


1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

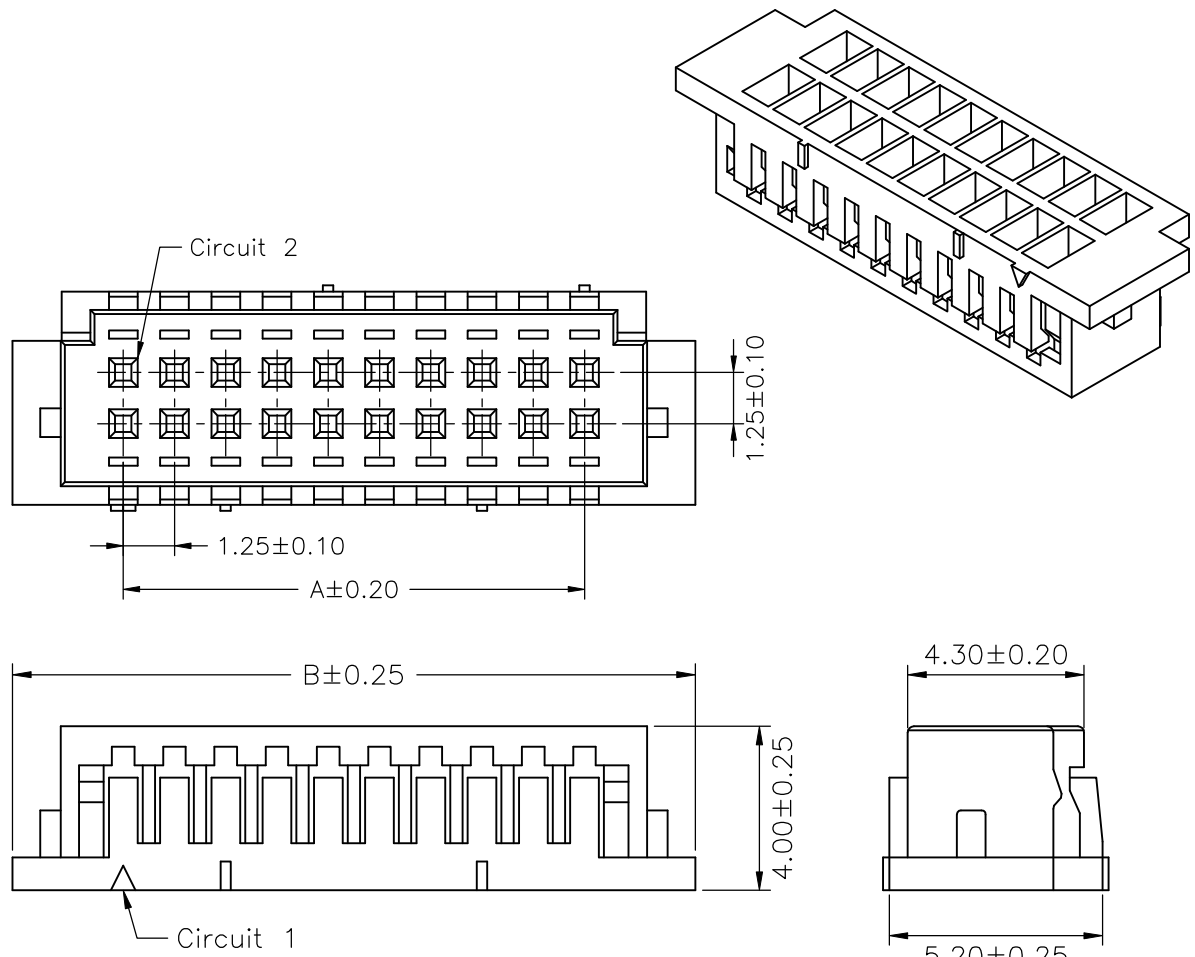

**SPECIFICATIONS**

Current Rating: 1A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Material: Nylon 66,UL94V-0

**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
DF13-H-2X05	5.00	10.40
DF13-H-2X10	11.25	16.65
DF13-H-2X15	17.50	22.90
DF13-H-2X20	23.75	29.15



PART NO. **DF13-H-2Xxx**

DWG NO. **DF13-H-2Xxx**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2  
 .XX ±  
 .XXX ±  
 AWG

DESCRIPTION: **1.25mm PITCH DUAL ROW HOUSING**

AREA	REVISIONS	HK	DATE

**煜倫股份有限公司**