


Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: - 40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0  
 Finish: Tin, Gold Plated  
 Standard: Nylon-6T

Note:  
 Duplex Plating: Gold Plated on contact area,  
 Tin on solder area

**Recommended P.C. Board  
 SMD Layout**

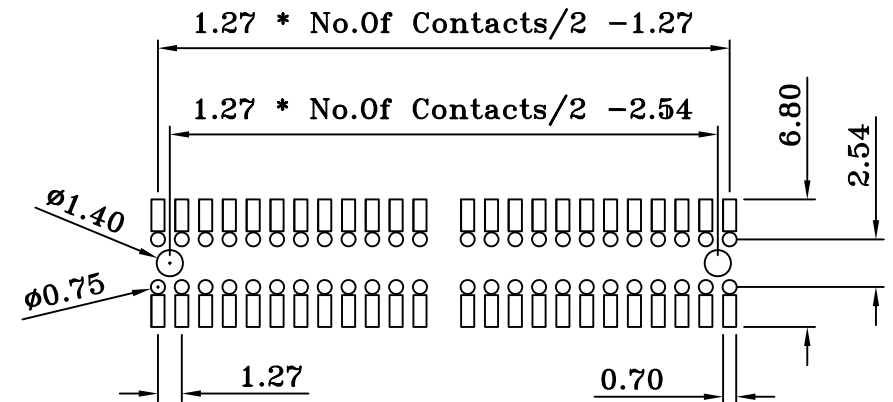

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES


DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION



**ORDER INFORMATION**

Y-Z60P-2Xxx-LF  
 SERIES LEADFREE  
 2X02:04WAY  
 2X50:100WAY  
 POST  
 HIGH 6.0mm  
 BOTTOM ENTRY SMT

DESCRIPTION: