

DETAIL Y

MATERIALS:


- HOUSING-PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR-BLACK
- SHIELD-0.25mm THICK COPPER ALLOY, NICKEL PLATED.
- CONTACTS-0.35mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND GOLD FLASH IN SOLDER AREA.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

MJF13C5-KX06Ax-0808-LF

LEADFREE

3:3.05mm
36:3.68mm
4:4.57mm

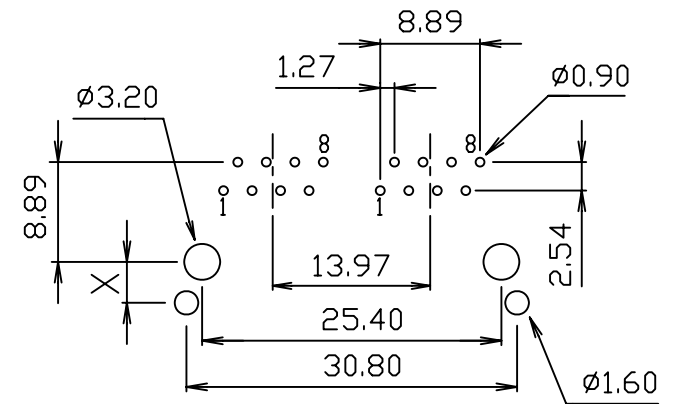

PC Board Layout Ref.

RoHS Compliant



PART NO. MJF13C5A2-KX06Ax-0808

DWG NO. MJF13C5A2-KX06Ax-0808

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X±0.2
.XX±
.XXX±
AWG

DESCRIPTION:

CAT.5 2PORTS 8POSITION SHIELDED SIDE ENTRY PCB GANGED JACK

AREA

REVISIONS

HK

DATE

焜倫股份有限公司