


PIN 0.80X0.30

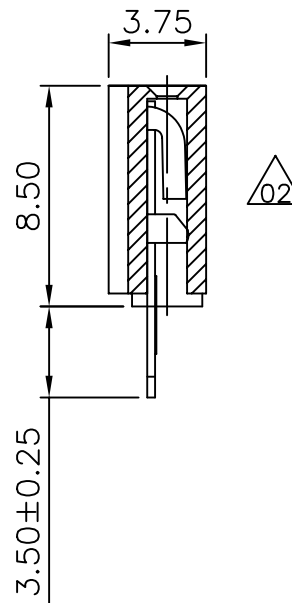


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 P.B.T

Recommended P.C.Board
 Hole Layout



MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. F-D85W-1Xxx

DWG NO. F-D85W-1Xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ±0.38
 .XX ±0.25
 .XXX ±0.13
 AWG

DESCRIPTION:

2.54 FEMALE HEADER SINGLE ROW DIP TYPE
 BASE 8.50H

AREA

REVISIONS

HK

DATE

焯倫有限公司