


SECT A-A

SECT B-B

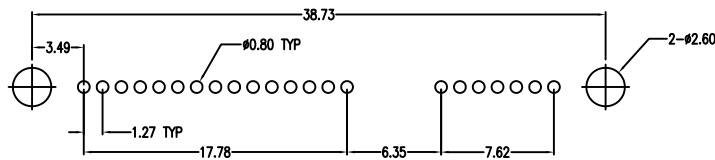

P.C.B. LAYOUT

NOTES:

***Material**

Housing: LCP, UL 94V-0 rated; Color: Black.
 Contact: Phosphor Bronze
 Plating: Gold Plating over Nickel on contact area;
 Tin plating on Solder Tail.

***Electrical Specification**

Operation Voltage: 100 VAC max.
 Current Rating: 1.5 Ampere per contact
 Contact Resistance: 30 Milliohms max.
 Insulation Resistance: 1000 Megohms min.
 Dielectric Withstanding Voltage: 500 VAC

***Environmental**

Operating Temperature: -55°C to +125°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES


DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION



ORDER INFORMATION

SATA-SD14P-7+15-LF
 SERIES | | | | LEADFREE
 | | | | 7+15 WAY
 | | | | POST
 | | | | 14.15mm
 | | | | DIP180°
 | | | | FEMALE

DESCRIPTION: SATA 7+15P Higher DIP Type Female (High: 15.85mm)