
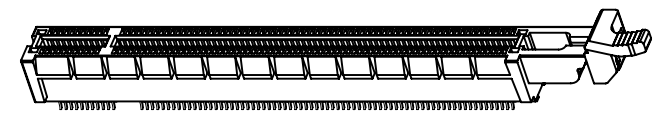
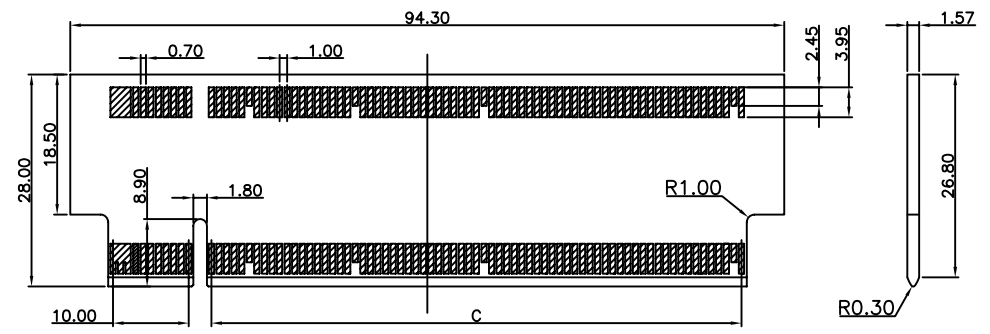



NOTE:
 MATERIAL:
 HOUSING:THERMOPLASTIC(NYLON+GF)
 CONTACT:BRASS
 PLATING:
 CONTACT: GOLD PLATING
 SPECIFICATION:
 VOLTAGE RATING: 50V
 CURRENT RATING: 1.1A
 CONTACT RESISTANCE TERMINAL:20m Ω MAX
 DIELECTRIC WITHSTANDING VOLTAGE:500V AC
 INSULATION RESISTANCE:1000M Ω MIN

PCIX-E-16436L8R-LF
 LEADFREE

RoHS Compliant

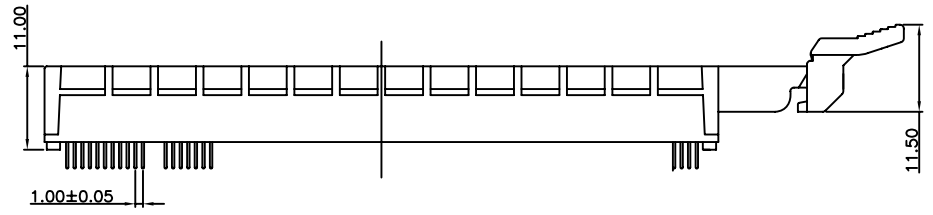

RECOMMENDED MODULE LAYOUT

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫股份有限公司

PART NO. PCIX-E-16436L8R		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: PCI 1.0 164Y旋轉夾板式成品	AREA	REVISIONS	HK	DATE
DWG NO. PCIX-E-16436L8R		DRAWING BY							
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								