

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F



E

D

C

B

A

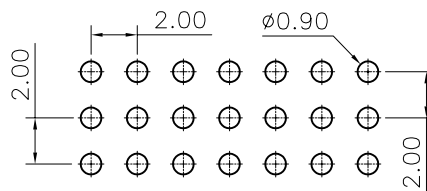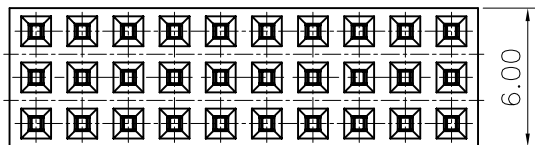

Recommended P.C.Board Hole Layout



1. Specifications

- Current Rating: 2Amp
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding: 500V AC
- Contact Resistance: 20mΩ Max.
- Operating Temperature: -40°C to +105°C

2. Materials

- Contact Material: Phosphor Bronze
- Housing Material: NY6T UL94V-0, Color: Black.

S-D63-3Xxx-LF
LEADFREE
RoHS Compliant

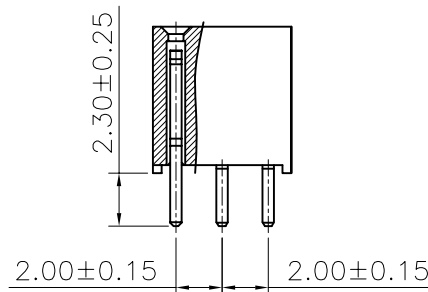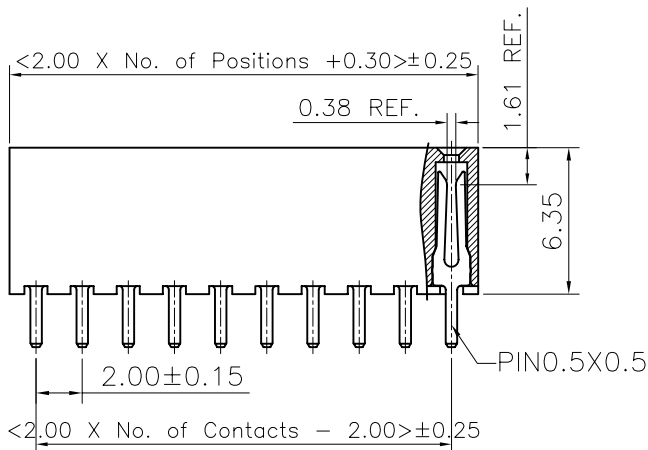

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. S-D63-3Xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: 2.00 FEMALE HEADER TRIPLE ROWS DIP TYPE BASE 6.35H			
DWG NO. S-D63-3Xxx					DRAWING BY	AREA	REVISIONS
FILE NO.		PROJECTION					
UNIT / mm	SCALE 1:1						