



03P



02P



SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min



Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Gold-flash

Material: Nylon 6T,UL94V-0


Color: Natural(Black)

PIN 0.64 SQ.
Circuit 1


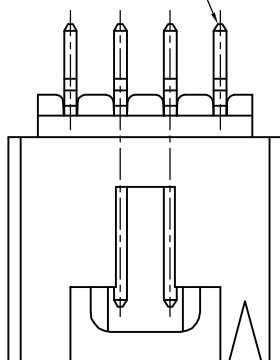


PCB LAYOUT

ø3.40±0.05 THRU HOLE-2 PLCS.
FOR PCB RETENTION
ø3.76±0.05 THRU HOLE-2 PLCS.
FOR LOCATION ONLY

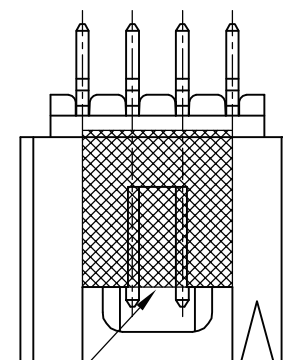

KAPTON TAPE
(FOR PICK AND
PLACE SYSTEMS)

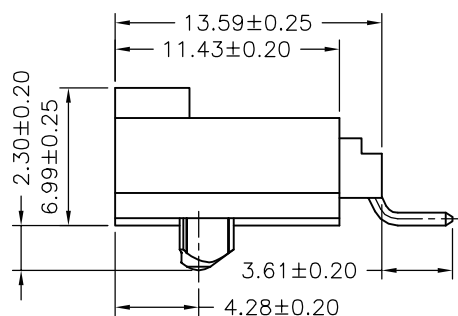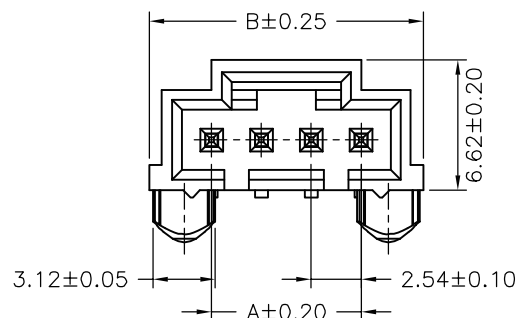

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MCG-WPC-1X02	2.54	8.89
MCG-WPC-1X03	5.08	11.43
MCG-WPC-1X04	7.62	13.97
MCG-WPC-1X05	10.16	16.51
MCG-WPC-1X06	12.70	19.05
MCG-WPC-1X07	15.24	21.59
MCG-WPC-1X08	17.78	24.13
MCG-WPC-1X09	20.32	26.67
MCG-WPC-1X10	22.86	29.21
MCG-WPC-1X11	25.40	31.75
MCG-WPC-1X12	27.94	34.29

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

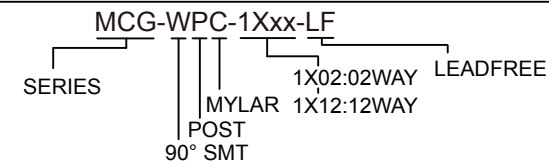

DESCRIPTION: