



**MATERIAL**


Insulator : NYLON 6T  
Contact Pin : Brass

**SPECIFICATION**

Current Rate : 1 AMP  
Insulation Resistance : 5000MΩMin. at DC 500V  
Contact Resistance : 20mΩMax. at DC 100mA  
Operation Temperature : -55°C to + 105°C

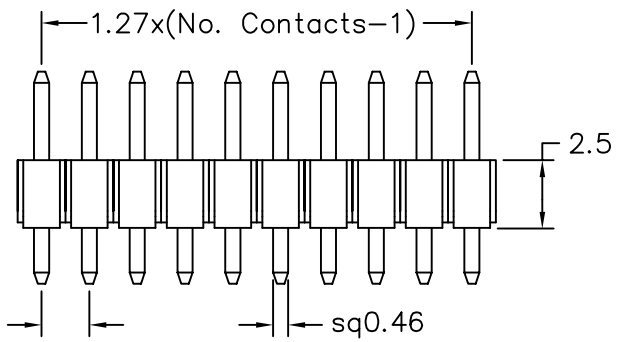

- 1. 2: Dual rows  
Plastic Height=2.5mm
- 2. No. of contacts per row
- 3. G: Gold flash  
T: Tin plated
- 4. B: Black Insulator  
W: White Insulator

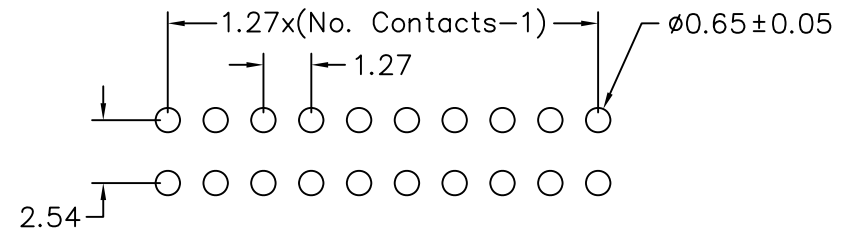

Recommended P.C.B Layout

P-D25-2Xxx-LF  
LEADFREE

RoHS Compliant



PART NO. P-D25-2Xxx	
DWG NO. P-D25-2Xxx	
FILE NO.	
UNIT / mm	SCALE 1:1

APPROVED BY CY	DRAWING BY
DRAWING BY	
PROJECTION	

TOLERANCES ARE
.0 =±.30
.00 =±.15
.000 =±.XXX
.0000=±.
ANG.=±3°

DESCRIPTION:	PIN HEADER 1.27*2.54mm STRAIGHT TYPE, DUAL ROWS			
	AREA	REVISIONS	HK	DATE

煜倫股份有限公司