
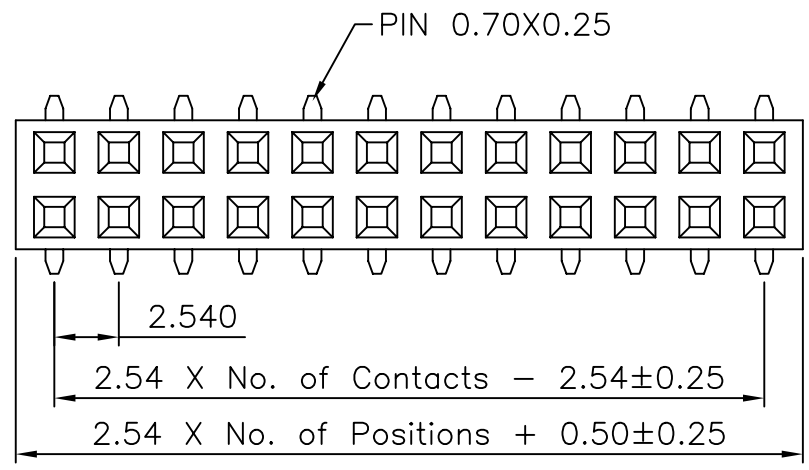


1 2 3 4 5 6 7 8 9 0


J  
I  
H  
G  
F  
E  
D  
C  
B  
A

**Specifications**  
 Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

**Materials**  
 Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon 6T

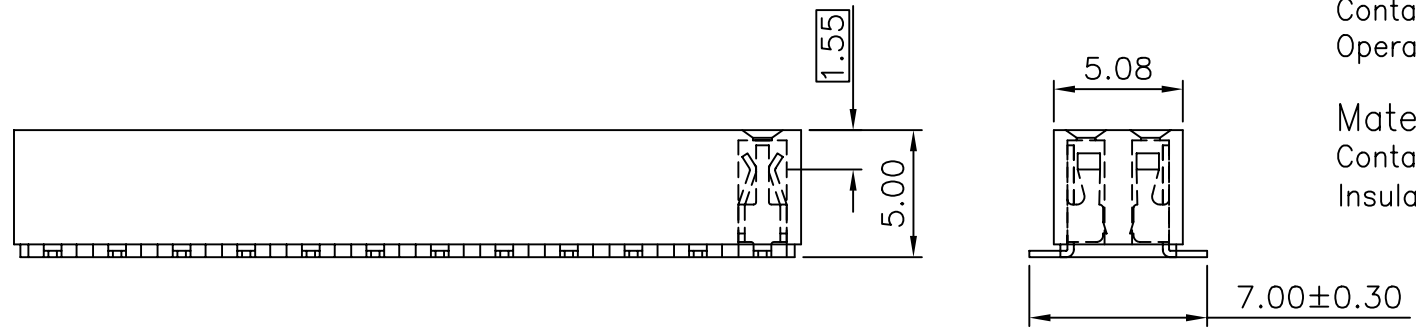

**Recommended P.C.Board Layout**

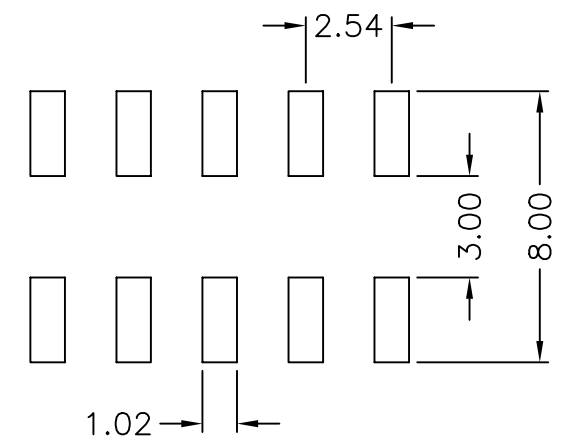

**MORETHANALL**  
 CONNECTORS  
 ASSEMBLIES

煜倫有限公司

PART NO. F-V50X-2Xxx

DWG NO. F-V50X-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE  
 .X ± 0.38  
 .XX ± 0.25  
 .XXX ± 0.13  
 AWG

DESCRIPTION:	2.54 FEMALE HEADER DUAL ROWS SMT TYPE BASE 5.00H			
	AREA	REVISIONS	HK	DATE