

SPECIFICATIONS


Voltage rating:300V AC,DC

Current rating:12A AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000M OHM min

Temperature range:-25°C~+90°C

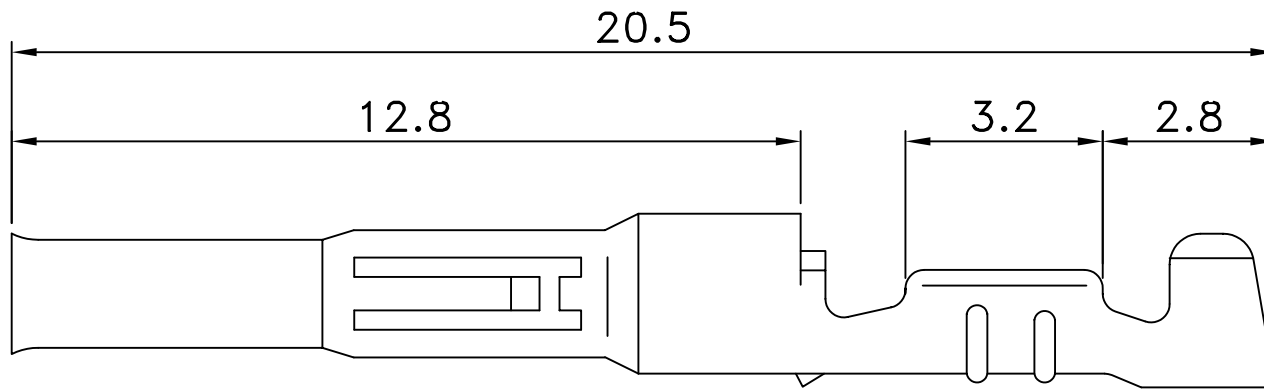

**L-F-xx-LF**

**LEADFREE**

**RoHS Compliant**

Part NO	WIRE RANGE	O.D.OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
	AWG				
L-F-14	20-14	1.9-3.4	PHOSPHOR	TIN-PLATED	3500
			GOLD-FLASH	BRONZE	
L-F-20	24-20	1.5-2.7	PHOSPHOR	TIN-PLATED	5000
			GOLD-FLASH	TIN-PLATED	



PART NO. **L-F-xx**

DWG NO. **L-F-xx**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司