




YA-Mx-2Xxx-LF
LEADFREE
X:WITHOUT POST
P:WITH POST

RoHS Compliant

Specifications

- Current Rating : 1 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C
- Max. Processing Temp. : 230°C for 30~60 Seconds
(260°C for Seconds)
- Contact Material : Phosphor Bronze
- Insulator Material : Polyester, UL 94V-0
- Standard : Nylon-6T
- Contact Plated : Full Gold, Full Tin, Selective Plated

Recommended
P.C. Board Layout

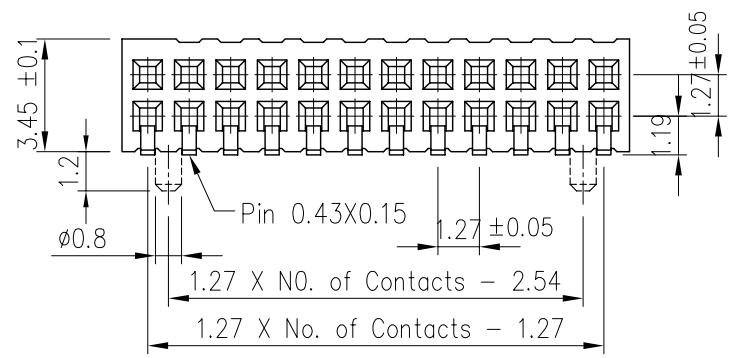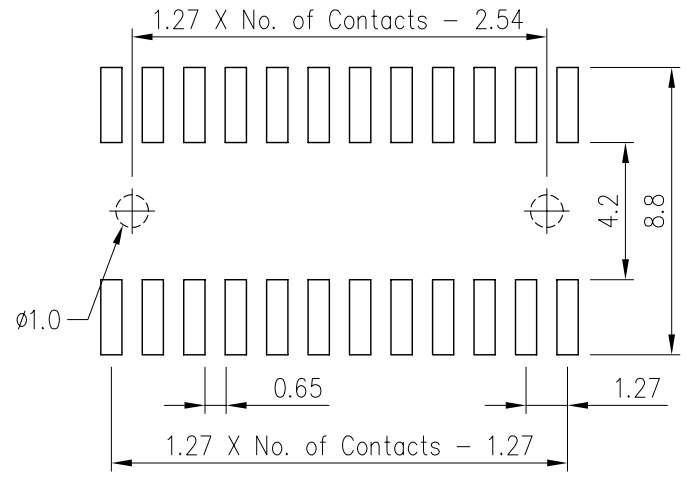

PART NO. YA-Mx-2Xxx	
DWG NO. YA-Mx-2Xxx	
FILE NO.	
UNIT / mm	SCALE 1:1

CHECKED BY CY	DRAWING BY
PROJECTION	

TOLERANCES ARE
.X ±0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:	Female Header P1.27X1.27mm Profile : 3.45mm, Dua Rows, SMT Type			
	AREA	REVISIONS	HK	DATE

煜倫股份有限公司