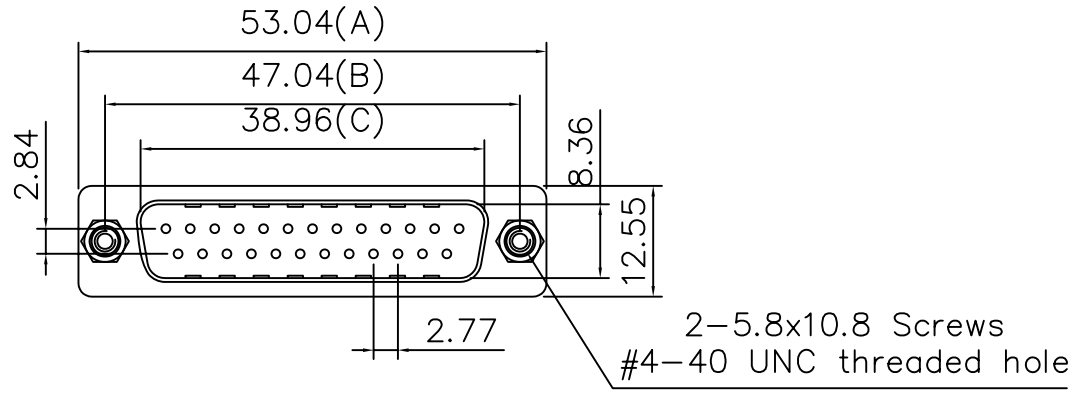

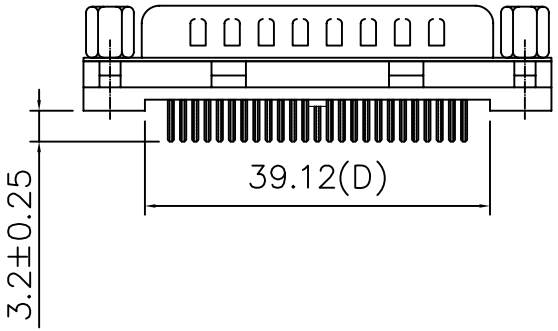



Specifications

Contact Resistance: Ω30m max. at DC 100mA
Insulator Resistance: 1000MΩ min. at DC 500V
Current Rating: 5 AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
Operating Temperature: −55℃ ~ +105℃
Contact: Brass
Housing: PBT & 30% Glass Fiber (UL 94V−0)

DDM−PNJ−xx−LF
LEADFREE

RoHS Compliant

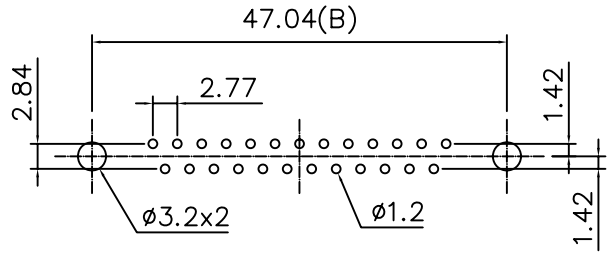

Recomended PCB Layout

Dimension

Positon	A	B	C	D
09	30.81	24.99	16.92	16.96
15	39.14	33.32	25.50	25.18
*25	53.04	47.04	38.96	39.12
37	69.32	63.50	55.42	55.68

MORETHANALL CONNECTORS ASSEMBLIES

煜倫股份有限公司

PART NO. DDM-PNJ-25			TOLERANCES ARE	DESCRIP TION:	D-SUB DIP STRAIGHT TYPE W/O METAL REAT SHELL
DWG NO. DDM-PNJ-25	CHECKED BY CY		.X ± 0.1 .XX ± 0.05 .XXX AWG		
FILE NO.	DRAWING BY			AREA	REVISIONS / HK / DATE
UNIT / mm	SCALE 1 : 1	PROJECTION			