
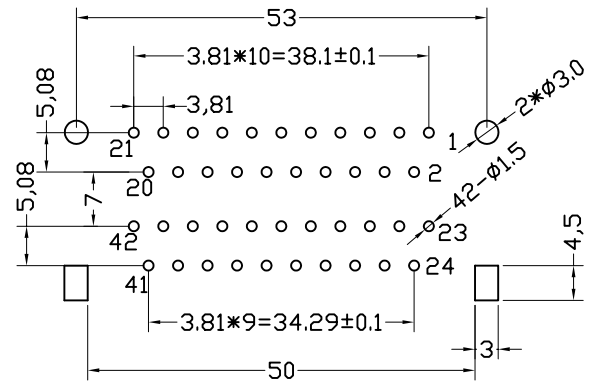
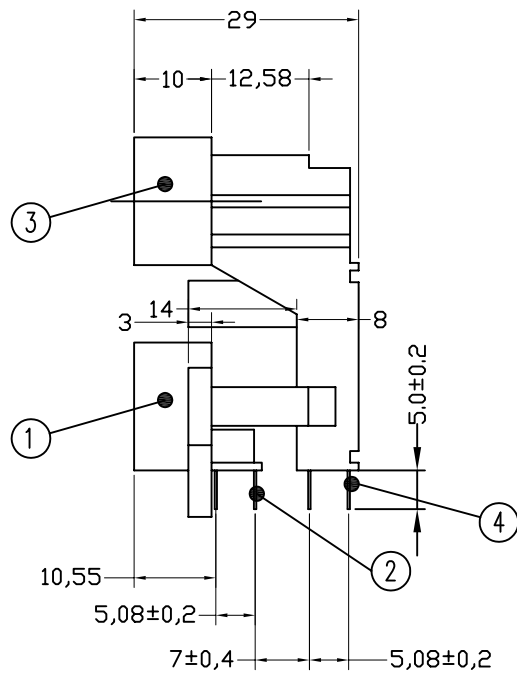


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

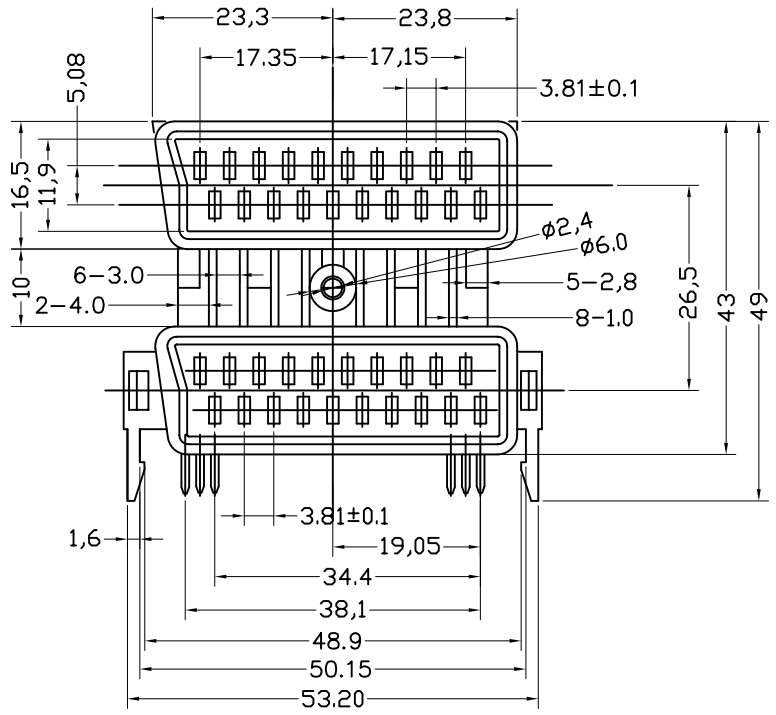

PCB HOLE PATTERN

MATERIAL:
 A.INSULATOR:PC(94V 2)
 B.CONTACT:BRONZE
 C.CONTACT PLATED:TIN PLATED

SPECIFICATION:
 A.CURRENT RATE:3A/250V AC

CONTACT RESISTANCE:
 A.(BRONZE)11.5MΩ AT 2V DC 100mA
 B.(PHOSPHOR BRONZE)10.9MΩ AT 2V DC 100mA
 C.INSULATOR RESISTANCE:1.5GΩ AT 500V DC 1Min
 D.dielectric withstanding:1000Vvar 1Min

SCB1-SRLH-21-LF
 LEADFREE
 RoHS Compliant



PART NO. SCB1-SRLH-21

DWG NO. SCB1-SRLH-21

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ± AWG

AREA REVISIONS HK DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA REVISIONS HK DATE