


MATERIAL :  
 INSULATOR : PBT+30% GLASS FIBER (UL94V-0)  
 CONTACT : PHOSPHOR BRONZE OR BRASS  
 CONTACT PLATED : GOLD OR TIN OVER NICKEL

SPECIFICATION :  
 CURRENT RATING : 1AMP.  
 WITHSTANDING VOLTAGE : AC 500V R.M.S  
 INSULATION RESISTANCE : 1000MEGOHMS MINIMUM  
 AT DC 500V.  
 CONTACT RESISTANCE : 15 MILLIOHMS MAXIMUM.  
 OPERATING TEMPERATURE ; -40°C~105°C.

HPCP-PDPZ-xxx-LF  
 LEADFREE  
 RoHS Compliant

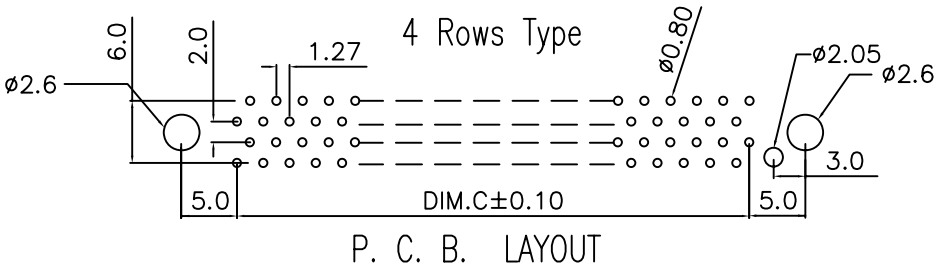

PIN	A	B	C	D
20	24.15	19.73	11.43	12.43
40	36.85	32.43	24.13	34.13
50	43.2	38.78	30.48	40.48
68	54.63	50.21	41.91	51.91
80	62.25	57.83	49.53	59.53



PART NO. HPCP-PDPZ-xxx		CHECKED BY CY		TOLERANCES ARE .X ±0.2 .XX ±0.1 .XXX ±0.05 AWG		DESCRIPTION:			
DWG NO. HPCP-PDPZ-xxx		DRAWING BY							
FILE NO.		PROJECTION				AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1								

煜倫股份有限公司