

J

I

H

G

F

E

D

C

B

A

PS-PE-1Xxx-LF
LEADFREE

RoHS Compliant

Specifications:

Current rating:5.0 AC/DC

Voltage rating:250V AC/DC

Contact resistance:20m ohm. max.

Insulator resistance:1000M ohm. Min.


Withstanding voltage:1500V AC for one minute

Operating temperture range:-25°C to + 105°C

Application wire:AWG#26 TO #18

Material and Finish:

Insulator:high Temp. Plastic(UL94V-2)

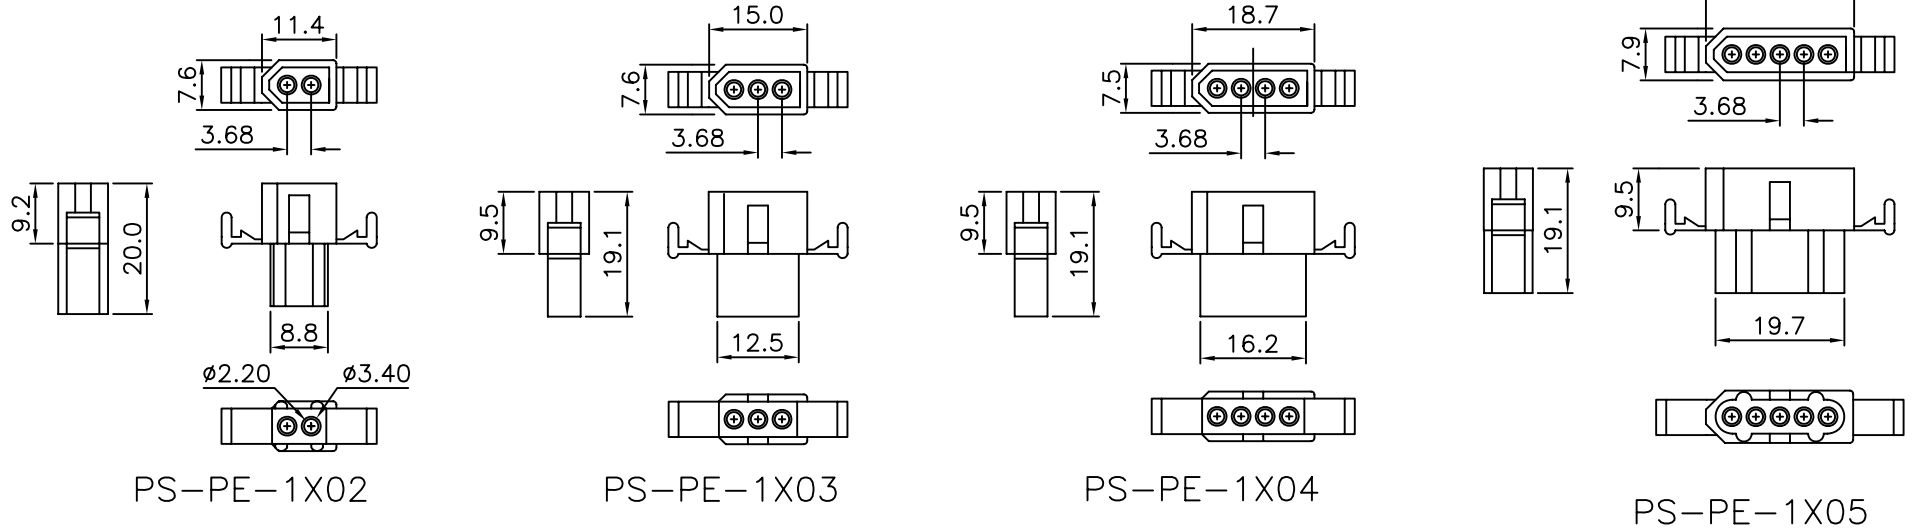

PART NO. PS-PE-1Xxx

DWG NO. PS-PE-1Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

Receptacle Housing Withoht Ear

AREA

REVISIONS

HK

DATE

煜倫股份有限公司