




A-A SECTION

■ **TERMINAL**

- Material: Phos. bronze
- Thickness: 0.2mm
- Plating: Gold Plated /Gold Flash
- Mating Specification:  
MPV-TGHF-26:2P~20P  
MPV-TGLF-26:21P~40P
- Wire Range: Suitable for AWG#26~30
- Insulation O.D: 1.35mm(max)
- Q'TY: 10,000 pcs/roll

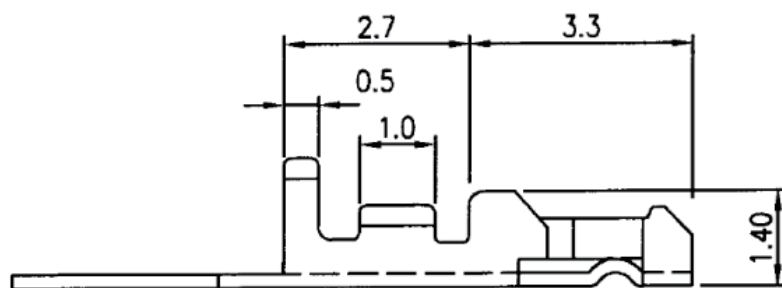

B-B SECTION

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

P PROJECTION



**ORDER INFORMATION**

MPV-TGxx-26-LF  
SERIES | LEADFREE  
26~30AWG  
HF:2P~20P  
LF:21P~40P  
GOLD  
TERMINAL

DESCRIPTION: