
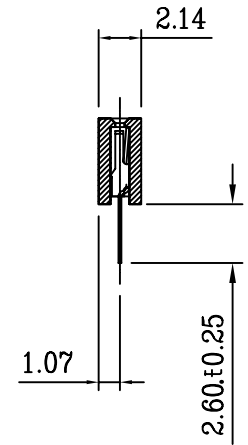
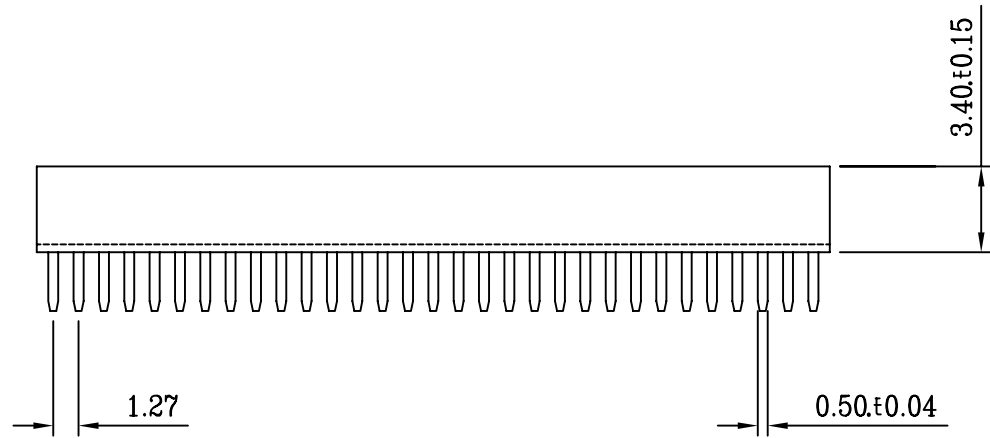



SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°-+105°C
- * Max Processing Temp: 230° for 30~60 seconds
(260° for 10 seconds)
- * Contact Material: Phosphor bronze
- * Housing: L.C.P (UL 94 V-0)

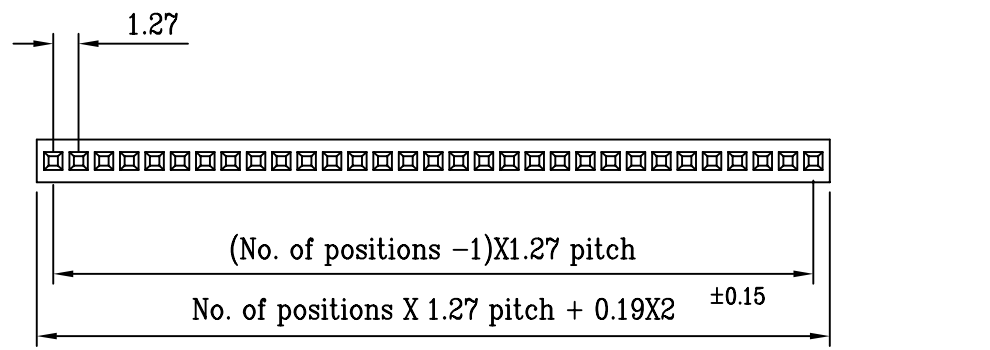

YA-D34-1Xxx-LF
LEADFREE

RoHS Compliant



PCB LAYOUT



PART NO. YA-D34-1Xxx

DWG NO. YA-D34-1Xxx

FILE NO.

UNIT / mm

CHECKED BY CY

DRAWING BY

SCALE 1:1 PROJECTION

TOLERANCES ARE

.X ± 0.15
.XX ± 0.10
.XXX ±
AWG

DESCRIP TION:

**1.27mm Dip Socket
(Straight/Base:3.4mm)**

AREA

REVISIONS

HK

DATE

煜倫股份有限公司