

Recommended P.C.B. Pattern Layout

General Tolerance: ±0.05

- NOTES:
- MECHANICAL:
 - MATING: 35N MAX.
 - WITHDRAWAL: 7N MIN, INITIAL.
 - 3N MIN AFTER 5000 CYCLES.
 - DURABILITY: 5000 CYCLES MIN.
 - ELECTRICAL:
 - CURRENT: 1.0A MAX
 - VOLTAGE: 30V MAX
 - WITHSTANDING VOLTAGE: 100V AC
 - CONTACT RESISTANCE: 50 mΩ MAX
 - INSULATION RESISTANCE: 100MΩ MIN
 - ENVIRONMENTAL
 - TEMPERATURE RANGE -55°C ~ +85°C

| tem | Part Name | Material | Q'TY |
|-----|-----------|-------------------------------|------|
| 1 | SHELL | COPPER ALLOY, 鍍底50U" MIN, 鍍霧錫 | 1 |
| 2 | HOUSING | THERMOPLASTIC | 1 |
| 3 | CONTACT | COPPER ALLOY | 5 |
| 4 | MYLAR | W=6.0mm | 1 |

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

X. ± 0.30


.X ± 0.20

.XX ± 0.15

.XXX ±

ANG ±


PJECTION





ORDER INFORMATION



DESCRIPTION:

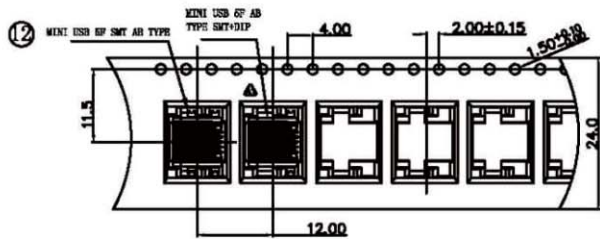

TAPE RUNNING DIRECTION

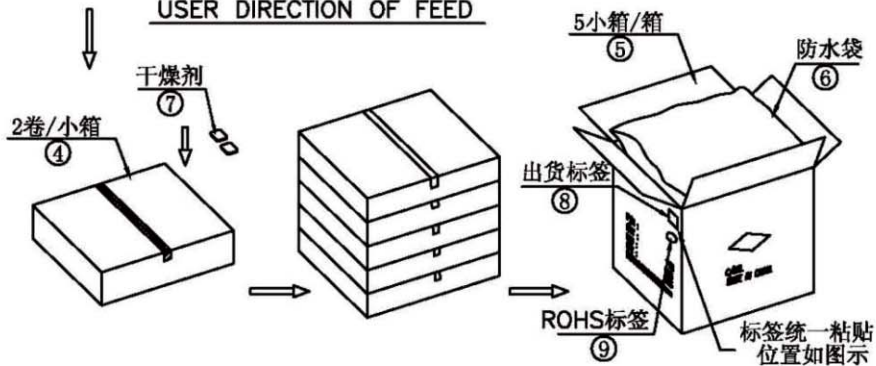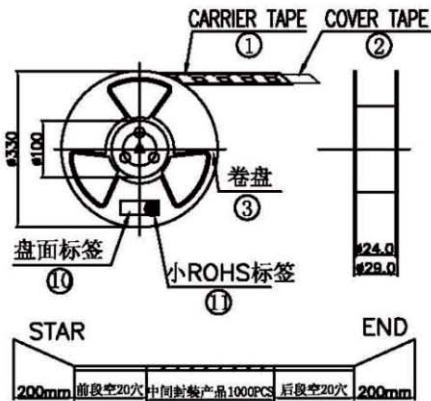

NOTE:

1. 如图所示, 将成品按规定之包装数量置入CARRIER TAPE中, 再将COVER TAPE贴合, 并于卷盘上贴上卷盘标签和ROHS标签各一张。
2. 每2卷装入一小箱, 计2000PCS/箱; 每小箱放两包干燥剂
3. 于外箱内层置一防水胶袋, 每5小箱装入外箱内, 共10000PCS/箱;
4. 纸箱封盖后以封箱胶封箱, 并于侧面贴上出货标签和ROHS标签;
5. 标签; 若客户另有贴标签要求, 则按其定单注明之要求贴, 粘贴位置如图示;
6. 外箱以封箱带绑固; (国内出货时外箱不用箱带绑固及不加防水袋)
7. 纸箱尺寸及印刷见包材图面。(总毛重仅作参考, 出货以实称为准) 未满足之零数箱, 需以缓冲材料填满。

8. 本包装方式适用产品:

MINI USB 5F AB TYPE 短体型

| 产品数量 | 产品净重 | 总毛重 |
|----------|--------|---------|
| 10000PCS | 5.05KG | 11.60KG |

| 序号 | 包材名称 | 料号 | PCS/盘 | 盘/箱 | 包装总数量 | 单位 | 备注 |
|----|--------------|------------------|-------|-----|-------------------|------------------------------|----|
| ⑫ | 成品 | B036/B040 Series | 10000 | PCS | | | |
| ⑪ | 小ROHS标签 | WG020T1003 | 10 | PCS | 15.7 | | |
| ⑩ | 盘面标签 | WG010T1001 | 10 | PCS | | | |
| ⑨ | ROHS标签 | WG020T1002 | 1 | PCS | 40.0 | | |
| ⑧ | 出货标签 | WG000T1001 | 1 | PCS | | | |
| ⑦ | 干燥剂 | WK001T1000 | 10 | BAG | | | |
| ⑥ | 防水袋 | WB021C1003 | 1 | PCS | L800*W750mm | | |
| ⑤ | 外纸箱 | WP001C2011 | 1 | PCS | 346*346*352 K=K | | |
| ④ | 内纸箱 | WP001C2015 | 5 | PCS | 332*332*61MM A3B | | |
| ③ | 卷盘 | WB031T1011 | 10 | SET | 330*100mm, W=24mm | | |
| ② | COVER TAPE | WB031T1010 | 1000 | 10 | PCS | W=21.3mm, 12.9M/REEL | |
| ① | CARRIER TAPE | WB031T1019 | | | | W=24mm, T=0.35mm, 12.5M/REEL | |

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG, ±

PJECTION



ORDER INFORMATION



DESCRIPTION: