

MATERIALS:

1. HOUSING: THERMOPLASTIC, UL 94V-0 RATED.
2. COVER: THERMOPLASTIC, UL 94V-0 RATED.
3. CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATED
4. SHELL: SPCC, NICKEL PLATED.
5. HARPOON: COPPER ALLOY, TIN OVER NICKEL

SPECIFICATION:

1. RATED CURRENT: 0.30A/CONTACT
2. INSULATION RESISTANCE: 500MOHM MIN.
3. DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1 MINUTE.
4. OPERATING TEMPERATURE: -25°C TO +85°C

VHCB1-SRN-068-LF
LEADFREE

RoHS Compliant



PART NO. VHCB1-SRN-068

DWG NO. VHCB1-SRN-068

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION: 68 POSITION CHAMP STACKED PITCH 0.80, RIGHT ANGLE TYPE

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ± .01
AWG



AREA	REVISIONS	HK	DATE
------	-----------	----	------

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

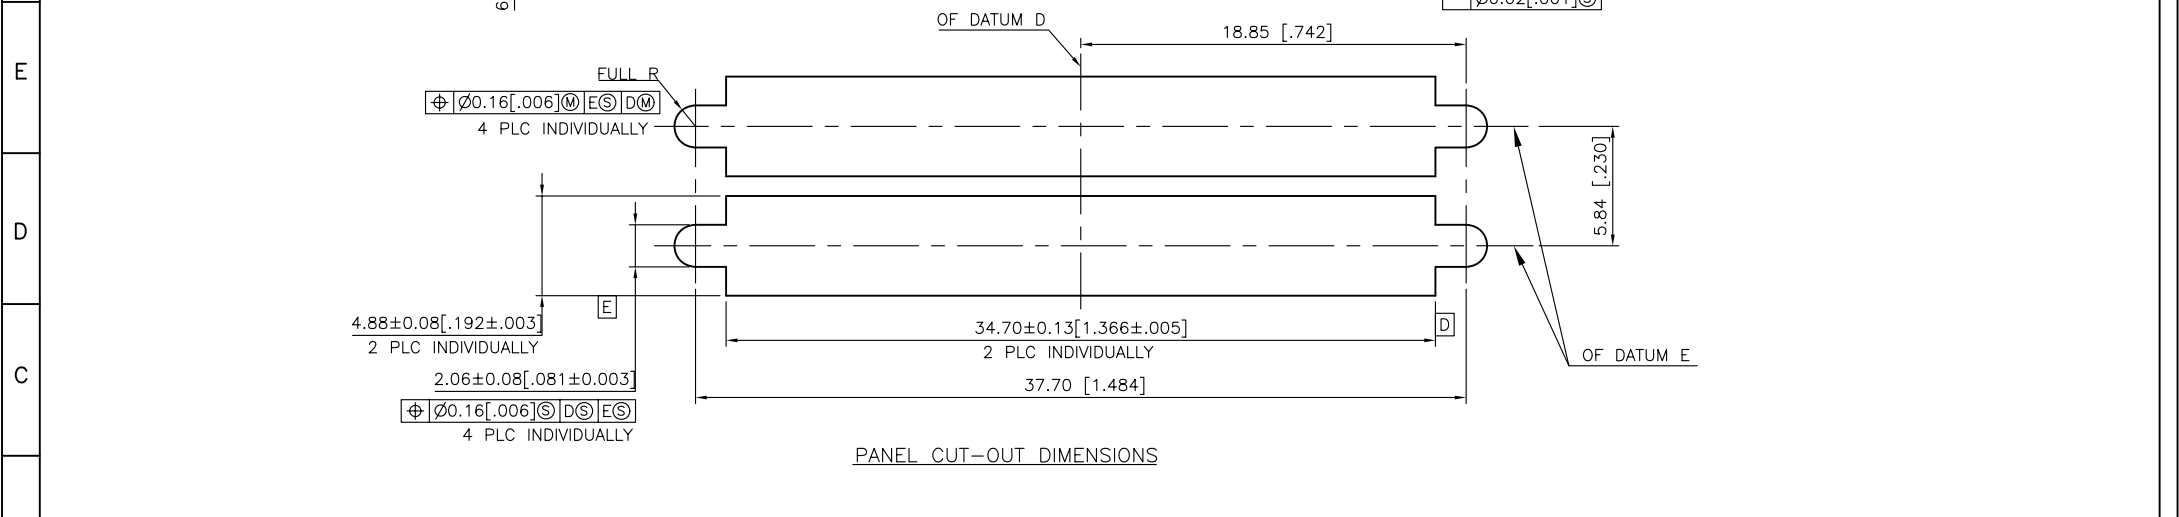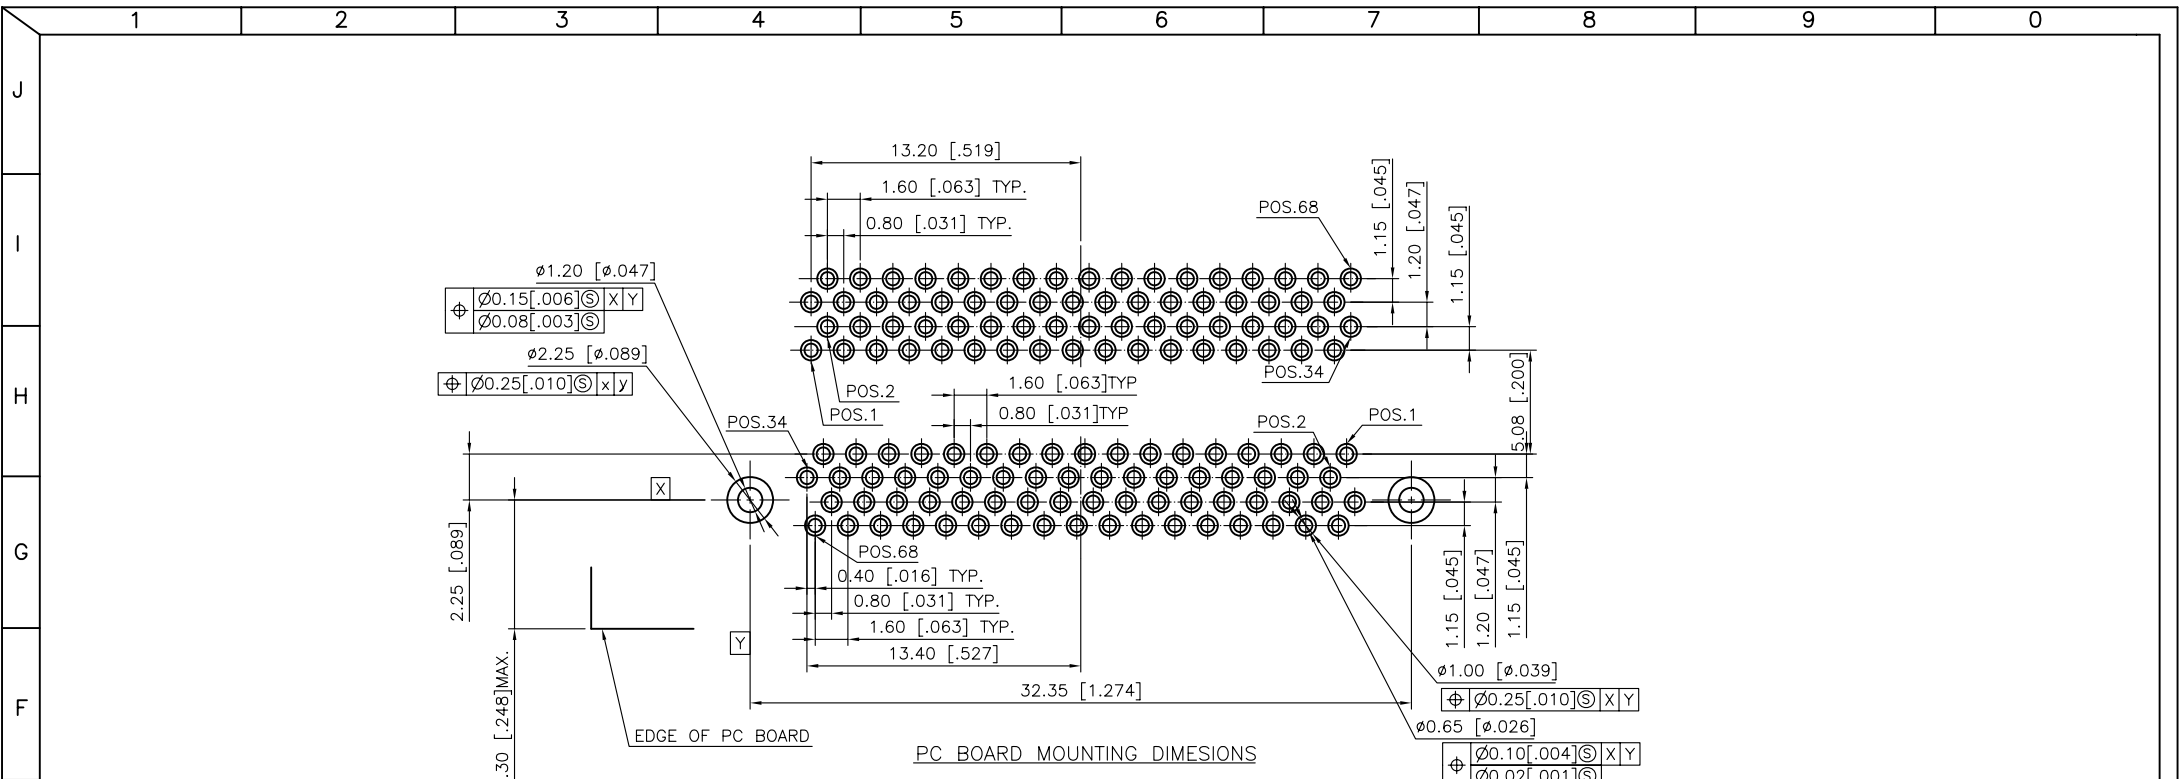

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. VHCB1-SRN-068

DWG NO. VHCB1-SRN-068

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

68 POSITION CHAMP STACKED
PITCH 0.80, RIGHT ANGLE TYE

煜倫股份有限公司

FILE NO.

UNIT / mm

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA


REVISIONS

HK

DATE

SCALE 1:1

PROJECTION



REVISIONS

HK

DATE