




# SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30~60 seconds  
(260° for 10 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P (UL 94 V-0)

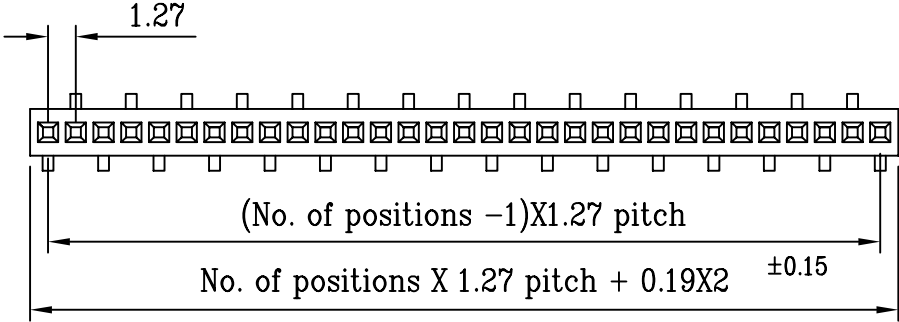

## PCB LAYOUT

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X. ±  
.X ± 0.15  
.XX ± 0.10  
.XXX ±  
ANG ±

PPOJECTION



ORDER INFORMATION

YA-V45X-1XxxL-LF

SERIES | L TYPE FOOT POSITION

180°SMT | NON POST | HIGH 4.5mm

1X02:02WAY

1X50:50WAY

DESCRIPTION: 1.27mm SMD Socket (Straight/Base:4.5mm)