


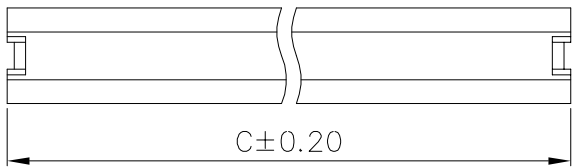
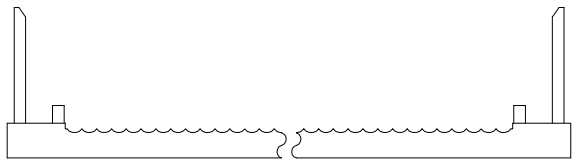
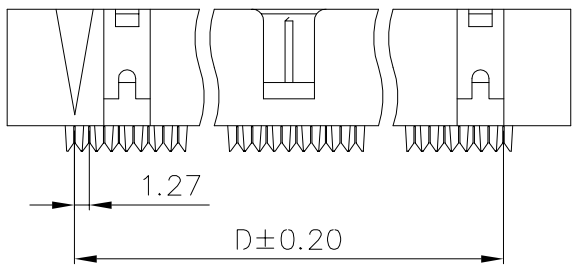


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

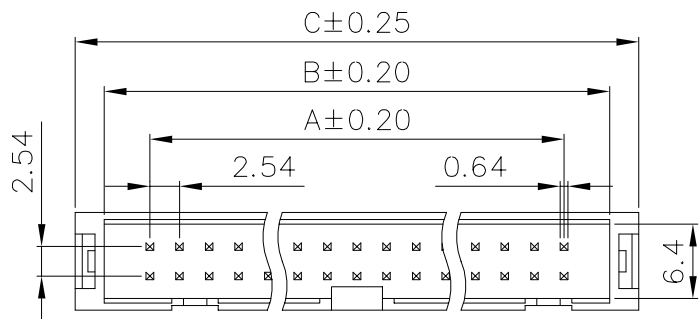

Material:
 Insulator: PBT+30% Glass Fiber (UL94V-0).
 Contact: Copper Alloy.
 Contact Plated: Gold or Tin over Nickel Plated.
 Specification:
 Current Rating: 1 Amp.
 Withstanding Voltage: AC 500V for 1 Minute.
 Insulation Resistance: 1000MΩ Min. at DC 500V.
 Contact Resistance: 15mΩ Max..
 Operating Temperature: -40°C ~ +105°C.

Pos.	Dim. A	Dim. B	Dim. C	Dim. D
10	10.16	18.15	22.95	11.43
14	15.24	23.23	28.03	16.51
16	17.78	25.77	30.57	19.05
20	22.86	30.85	35.65	24.13
24	27.94	35.93	40.73	29.21
26	30.48	38.47	43.27	31.75
30	35.56	43.55	48.35	36.83
34	40.64	48.63	53.43	41.91
40	48.26	56.25	61.05	49.53
50	60.96	68.95	73.75	62.23
60	73.66	81.65	86.45	74.93
64	78.74	86.73	91.53	80.01



PART NO. **B-C2-xx**

DWG NO. **B-C2-xx**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE
 .X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:	2.54mm IDC Box Header Without Ear Type			
	AREA	REVISIONS	HK	DATE

煜倫股份有限公司