

Note:

1.Material:





- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.20mm
- 1.3 Shell: Spcc,up t=0.20mm,down t=0.30mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min.
- 2.5 Total mating force: 3.0 Kgf Max.
- 2.6 Total unmating force: 0.5 Kgf Min.
- 2.7 Temperature range: -55°C~85°C

1394A-PS-04-LF  
LEADFREE  
RoHS Compliant

No.	Name	Q'ty	Part No.	Finish
8	Back-shell			
7	Front-shell			
6	Clip			No finish
5	Contact			Selective Au plated on mating area
4	Contact			
3	Contact			
2	Contact			
1	Housing			Black

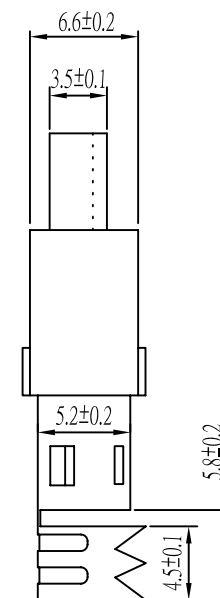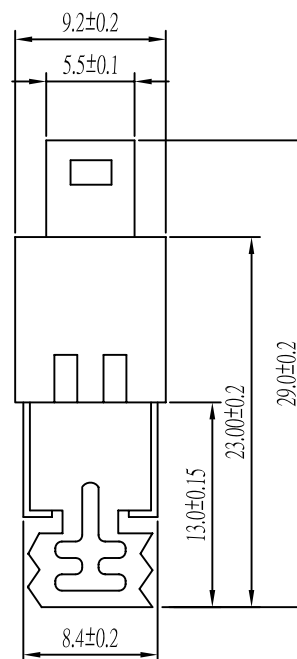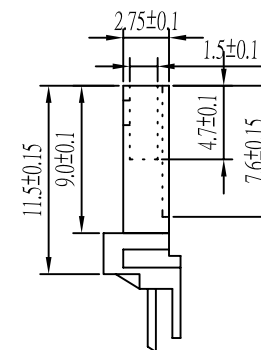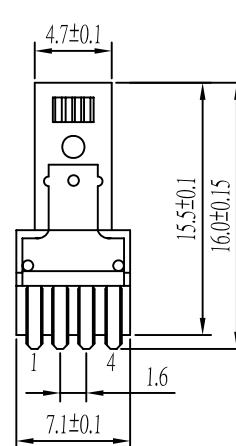

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. 1394A-PS-04

DWG NO. 1394A-PS-04

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION: IEEE 1394-4PIN(M) MOLDING

FILE NO.

DRAWING BY

.X ±0.3  
.XX ±0.2  
.XXX ±0.1  
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

