

Technical Data:

Material:



- Solder Pin: Brass with Tin plated
- Insulator body(housing): Polyamide(Glass filled)
(UL94V-0)

Electrical


- Voltage rating: 125VAC
- Current rating: 8A
- Insulation resistance: 500MΩ at DC 500V
- Withstanding Voltage: AC 1200V(1min)

Mechanical:


- Using temperature Range: -40°C to +105°C
- Soldering temperature:+250°,5seconds Max.

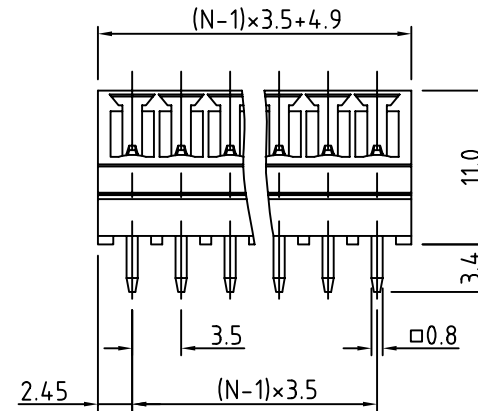

N=Number of contacts



P.C.B LAYOUT

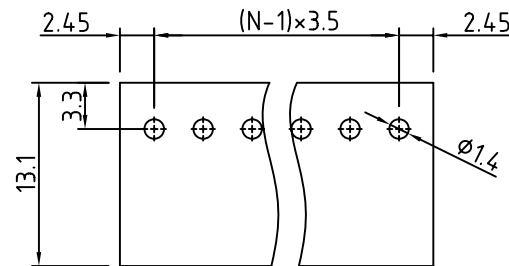

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PROJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

TBH035-PAC-xx-LF

SERIES | LEADFREE
02-24 WAY
CAGE
SLANT DIP
MALE

DESCRIPTION: