


* Material: Polyester, UL94V-0

Specifications

- * Current rating: 3A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- * Insulation resistance: $1,000\text{M}\Omega$ min.
- * Withstand voltage: 1,500V AC/minute

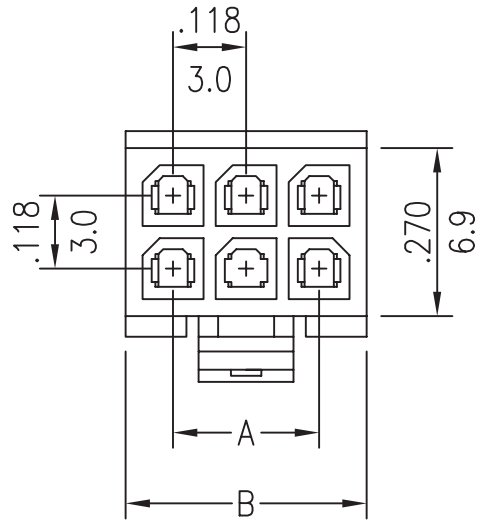

RoHS Compliant

CIRCUITS	PART NO.	DIMENSION in.(mm)	
		A	B
4	MIF-SH-2X02	0.118(3.0)	0.270(6.85)
6	MIF-SH-2X03	0.236(6.0)	0.388(9.85)
8	MIF-SH-2X04	0.354(9.0)	0.506(12.85)
10	MIF-SH-2X05	0.472(12.0)	0.624(15.85)
12	MIF-SH-2X06	0.591(15.0)	0.742(18.85)
14	MIF-SH-2X07	0.709(18.0)	0.860(21.85)
16	MIF-SH-2X08	0.827(21.0)	0.978(24.85)
18	MIF-SH-2X09	0.945(24.0)	1.096(27.85)
20	MIF-SH-2X10	1.063(27.0)	1.215(30.85)
22	MIF-SH-2X11	1.181(30.0)	1.333(33.85)
24	MIF-SH-2X12	1.299(33.0)	1.451(36.85)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE


SIZE A4

P PROJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

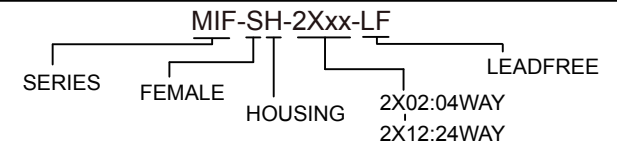

DESCRIPTION: