

SPECIFICATION:



A=SL002

B=MATERIAL:Spring Brass
Thickness:0.4t

C=Fuse \varnothing 5x20mm 250V AC 10A Max

D=Bright Tin-Plated, Nickel-Plated

E=P.C. Board Type with Fuse Stops

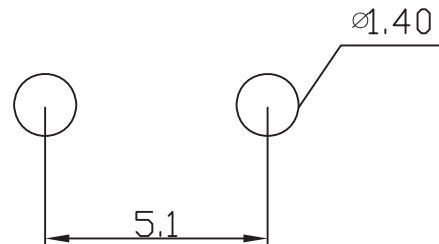

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE

SIZE A4

PROJECTION

X. \pm
.X \pm
.XX \pm
.XXX \pm
ANG \pm



ORDER INFORMATION

FSC-D-5X20-LF
SERIES | LEADFREE
5X20mm
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: