

NOTES:

- 1. MATERIAL: INSULATOR: LCP UL94V-0
CONTACT: PHOSPHOR BRONZE
SHELL: Ni-Ag ALLOY
- 2. CONTACT FINISH: 0. WITHOUT PLATING.
 - 1. 5u" MIN. GOLD ON CONTACT. TIN ON SOLDER TAIL. BOTH OVER NICKEL.(LEADFREE MATTE)
 - 2. 15u" MIN. GOLD ON CONTACT. TIN ON SOLDER TAIL. BOTH OVER NICKEL.(LEADFREE MATTE)
- 3. IMPORTANT AREA FLASH: 0.05mm MAX. DAMAGE: NA. DEFORM: NA.
- 4. LOGO TYPE: 2. WITHOUT LOGO
- 5. PACKING TYPE: 1. REEL 2. TRAY 3. TUBE

FIX-WXF10AR-30-LF
LEADFREE

RoHS Compliant



PART NO. FIX-WXF10AR-30

DWG NO. FIX-WXF10AR-30

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG


AREA	REVISIONS	HK	DATE
------	-----------	----	------

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

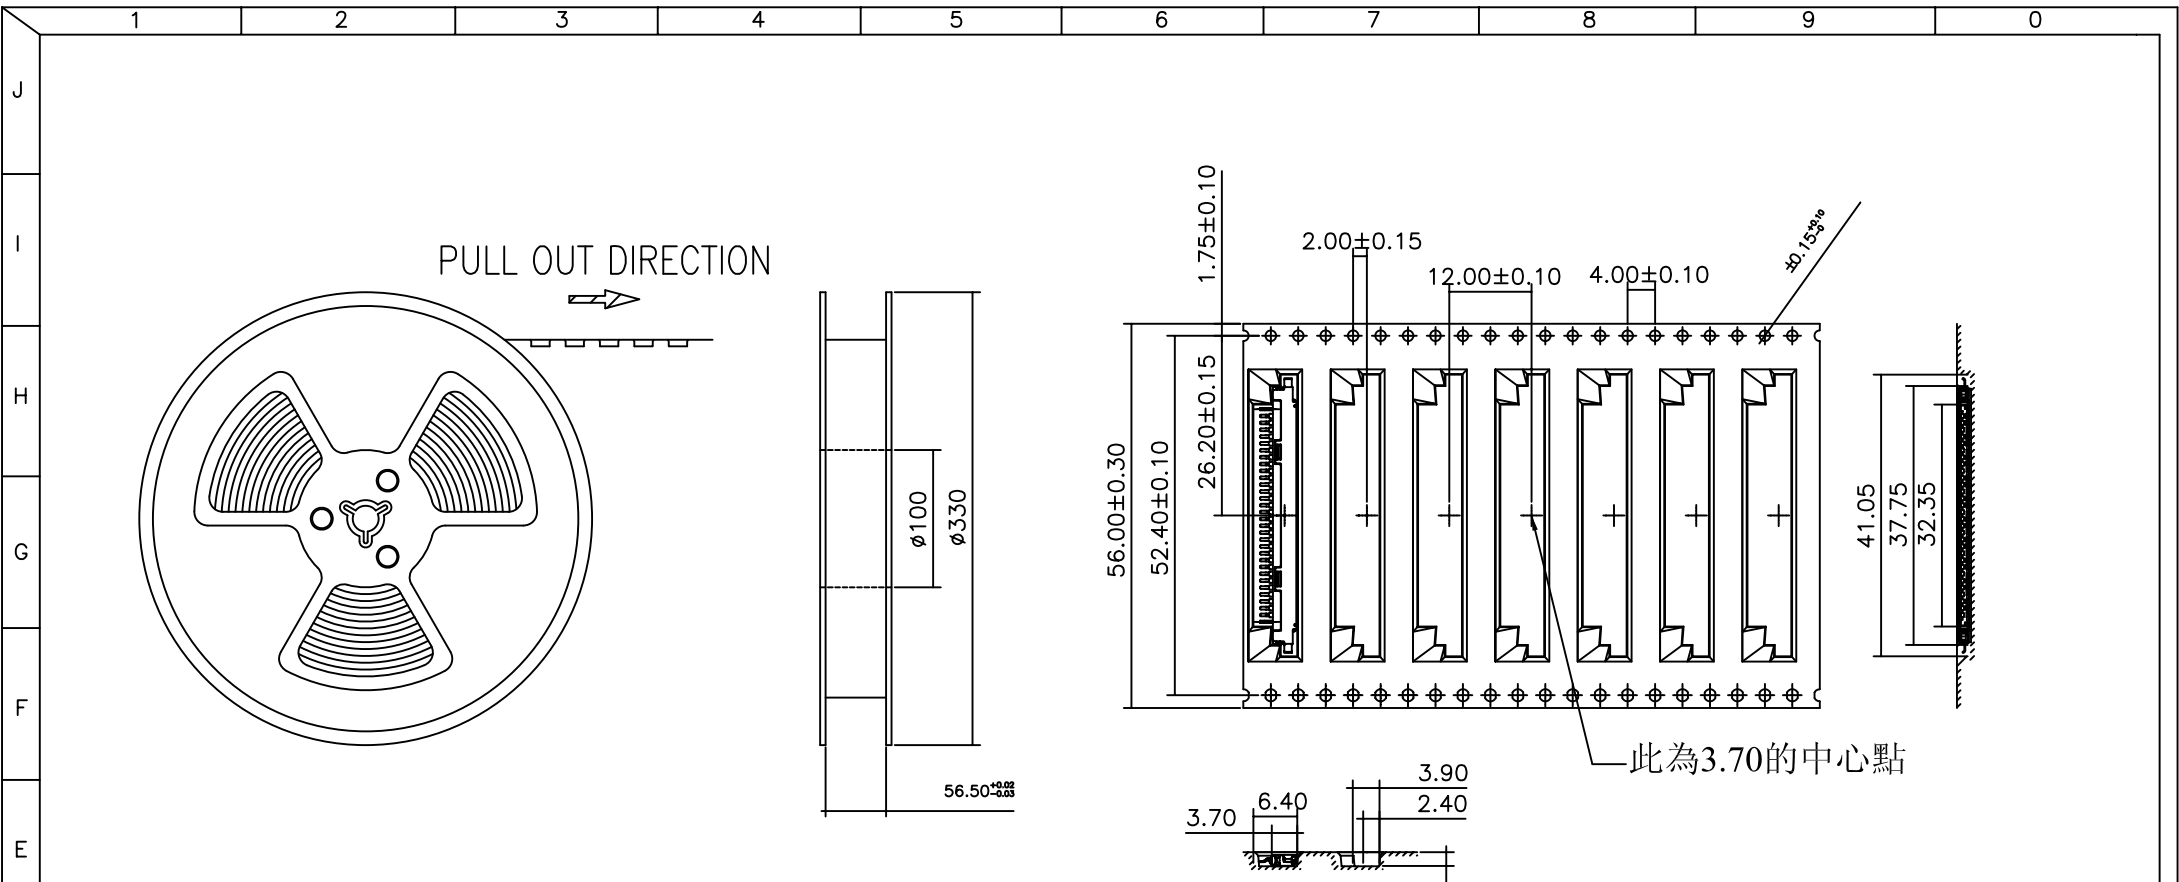

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black Conductive Polystyrene Alloy
4. All dimensions meet EIA-481-B requirements.
5. Thickness : 0.30 ± 0.05 mm.
6. Component load per 13" reel : 2500 pcs.

W	56.00 ± 0.30
A0	3.70 ± 0.10
B0	37.75 ± 0.10
K0	2.00 ± 0.10



PART NO. FIX-WXF10AR-30

DWG NO. FIX-WXF10AR-30

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2
 .XX ± 0.1
 .XXX \pm
 AWG


AREA	REVISIONS	HK	DATE
------	-----------	----	------

煜倫股份有限公司


UNIT / mm

SCALE 1:1

PROJECTION

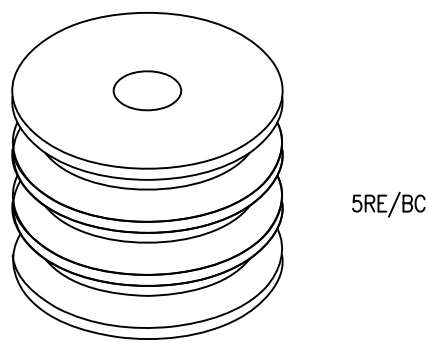

5RE/BC

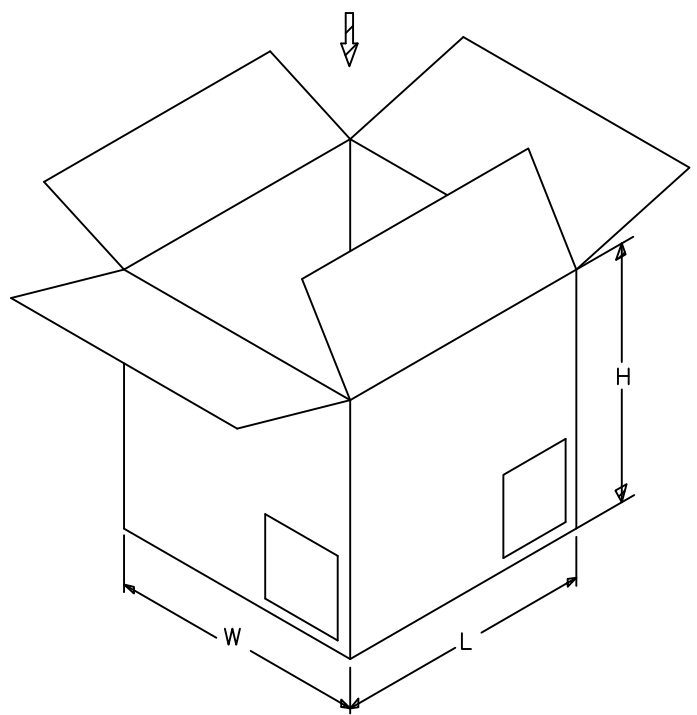

PCAKING MATERIAL

PART NAME	DIM(mm)
REEL	330X56.5
BIG CRTON	350X350X340

PCAKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
FIX-WXF10AR-30	2500PCS/RE	5 RE/BC	12500 PCS/BC



PART NO. FIX-WXF10AR-30

DWG NO. FIX-WXF10AR-30

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION 