


Recommended P.C.Board
Hole Layout

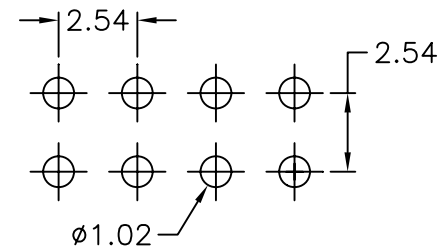

Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 P.B.T +30%



PART NO. FK-RK-2Xxx

DWG NO. FK-RK-2Xxx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 AWG

DESCRIP TION: 2.54 FEMALE HEADER DUAL ROWS DIP TYPE BASE 8.50H

AREA

REVISIONS

HK

DATE

煜倫股份有限公司