

■ MATERIAL


- Insulator: Glass-Fiber P.B.T(UL94V-0)
- Contact: Phosphor Bronze (P) or Brass (B)
- Plating: Gold Plating Over Nickel.

■ SPECIFICATIONS

- Insulation Resistance: 5000 M  $\Omega$  min at 500 VDC
- Dielectric Withstanding Voltage: 1000 V-AC/1 min
- Current Rating: 3A
- Contact Resistance: 20m  $\Omega$  max
- Operating Temperature: -55  $^{\circ}$ C to 105  $^{\circ}$ C
- Insertion Force: 340g max per pair
- Withdrawal Force: 28g min per pair

■ DIMENSIONS

Circuits	A	B	C	D	Circuits	A	B	C	D
6	5.08	10.66	14.22		48	58.42	64.00	67.56	
8	7.62	13.20	16.76		50	60.96	66.54	70.10	
10	10.16	15.74	19.30		52	63.50	69.08	72.64	
12	12.70	18.28	21.84		54	66.04	71.62	75.18	
14	15.24	20.82	24.38		56	68.58	74.16	77.72	
16	17.78	23.36	26.92		58	71.12	76.70	80.26	
18	20.32	25.90	29.46		60	73.66	79.24	82.80	
20	22.86	28.44	32.00		62	76.20	81.78	85.34	
22	25.40	30.98	34.54		64	78.74	84.32	87.88	
24	27.94	33.52	37.08		66	81.28	86.86	90.42	
26	30.48	36.06	39.62		68	83.82	89.40	92.96	
28	33.02	38.60	42.16		70	86.36	91.94	95.50	
30	35.56	41.14	44.70		72	88.90	94.48	98.04	
32	38.10	43.68	47.24		80	99.08	104.64	108.20	
34	40.64	46.22	49.78		86	106.68	112.26	115.82	
36	43.18	48.76	52.32		92	114.30	119.88	123.44	
38	45.72	51.30	54.86		98	129.54	135.12	138.68	
40	48.26	53.84	57.40		100	124.46	130.04	133.60	
42	50.80	56.38	59.94		104	129.54	135.12	138.68	
44	53.34	58.92	62.48		110	137.16	142.74	146.30	
46	55.88	61.46	65.02		120	149.86	155.44	159.00	

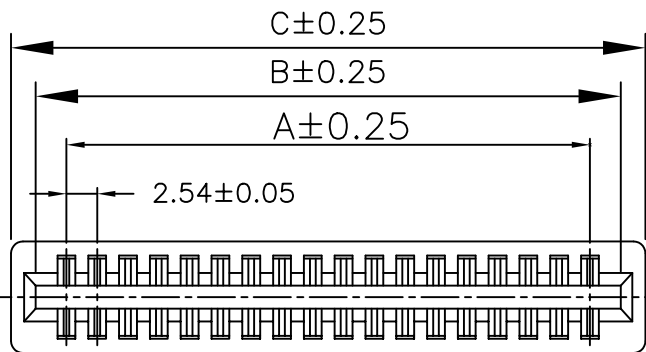

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

煜倫有限公司

PART NO. GE-E-xxx

DWG NO. GE-E-xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X  
.XX  
.XXX  
AWG

DESCRIPTION: SLOT 2.54mm PITCH FOR CLIP BOARD

AREA

REVISIONS

HK

DATE