

Note:

1. Material:
  - 1.1 Insulator: High temperature thermoplastic with g.f, UL94v-0
  - 1.2 Contact: Copper alloy, t=0.20mm
  - 1.3 Shell: Spcc, t=0.30mm
2. Specification:
  - 2.1 Current rating: 1 A Max.
  - 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
  - 2.3 Contact resistance: 30 mΩ Max.
  - 2.4 Insulation resistance: 1000 MΩ Min.
  - 2.5 Total mating force: 7.0 Kgf Max.
  - 2.6 Total unmating force: 1.5 Kgf Min.
  - 2.7 Temperature range: -55°C~85°C

PART NO	A±0.25	B±0.20	C±0.20	D±0.20	E±0.30	F±0.25	G±0.25	H±0.05	I±0.10	J±0.25	K±0.25
DS-SSN-09	30.81	24.99	16.33	7.9	15.0		12.55	2.77	2.84		
DS-SSN-15	39.25	33.32	24.66	7.9	15.0		12.55	2.77	2.84		
DS-SSN-25	53.04	47.04	38.38	7.9	15.0		12.55	2.77	2.84		
DS-SSN-37	69.50	63.50	54.84	7.9	15.0		12.55	2.77	2.84		


RoHS Compliant TOLERANCES ARE




煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		X, ± .X ± 0.30 .XX ± 0.20 .XXX ± 0.10 ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	P PROJECTION	



ORDER INFORMATION

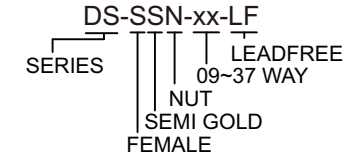

DESCRIPTION: D-SUB SOLDER FEMALE 鍍後型 (通孔)