





• MATERIALS:(RoHS Compliant)

Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts: Phosphor Bronze Gold
Selective Plated

• ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +105°C

HPDP-SD-068-LF
LEADFREE
RoHS Compliant

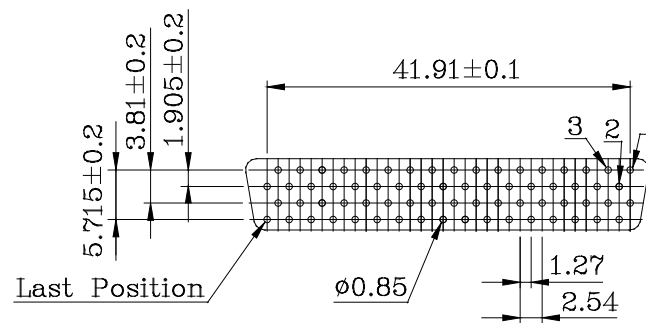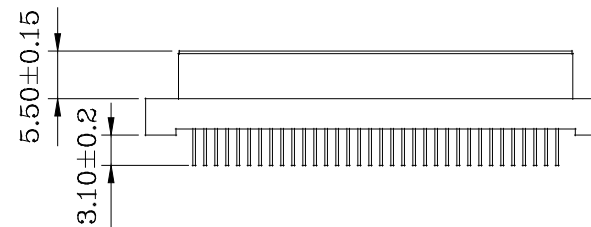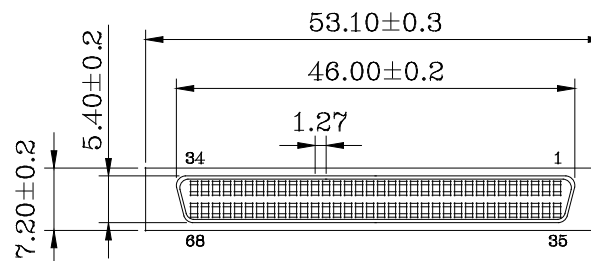

PCB Layout (B)



PART NO. HPDP-SD-068

DWG NO. HPDP-SD-068

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ±
.XX ±
.XXX ±
AWG

DESCRIPTION:

1.27mm (.050") Pin Type 68Pos
Receptacles Headers Vertical
Mount Type (Unshielded)

AREA

REVISIONS

HK

DATE

焜倫股份有限公司