

PCB Layout For
Surface Mounting

NOTE

A. Material:

1. Housing : Nylon-9T Halogen Free, UL94V-0, Black
2. Contact : Copper Alloy

B. Plating: Gold plating

C. Temperature: -55 to 125

D. Electrical:

1. Voltage : 50V.
2. Current : 0.5A.
3. Contact Resistance : 40m Ω max.
4. Dielectric Withstanding Voltage : 500V AC / 1 min.
5. Insulation Resistance : 100M Ω min.

Available Pins : 10~100 Contacts

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1 : 1

DATE


SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.10
.XXX ± 0.05
ANG ±



ORDER INFORMATION

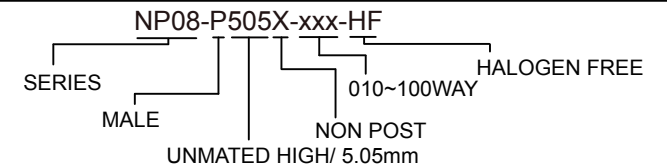

DESCRIPTION: