


MATERIAL:
 •HOUSING-PBT POLYESTER UL94V-0
 MIXED GLASS FIBER,
 STANDARD ODDOR-BLACK
 •CONTACTS-0.35mm THICK PHOS-BRONZE
 PLATED WITH HARD GOLD AND
 GOLD FLASH IN SOLDER AREA.
 •SHIELD-0.25mm THICK COPPER ALLOY,
 PLATED WITH NICKEL.
 CAVITY CONFORMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

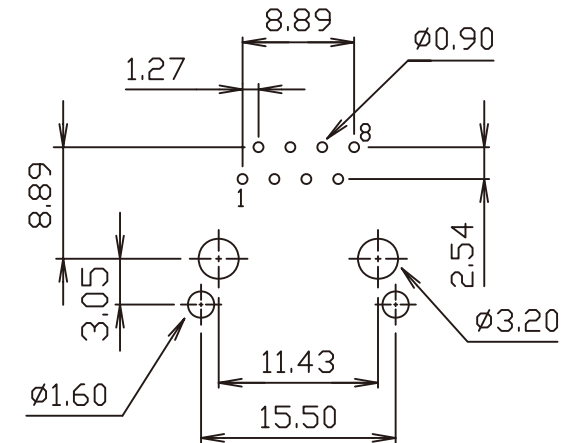

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1:1

.XX±


DATE

.XXX±

ANG±

SIZE A4

PJECTION



ORDER INFORMATION

MJF13-KF06A3T3-0808-LF

SERIES LEADFREE

BLACK 0.35t 8P8C

FRONT TAB 3.05mm

06u" GOLD FULL SPRING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 8 POSITION SHIELDED S-P.G. FLAT PIN SIDE ENTRY PCB JACK