

# SPECIFICATIONS

## Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C



Insulation Resistance: 1000MΩ/ min.

Dielectric Withstanding Voltage: 1500V AC/ min.

Contact Resistance: 10mΩ/ max.

## Material

Material: Nylon66, UL94V-2

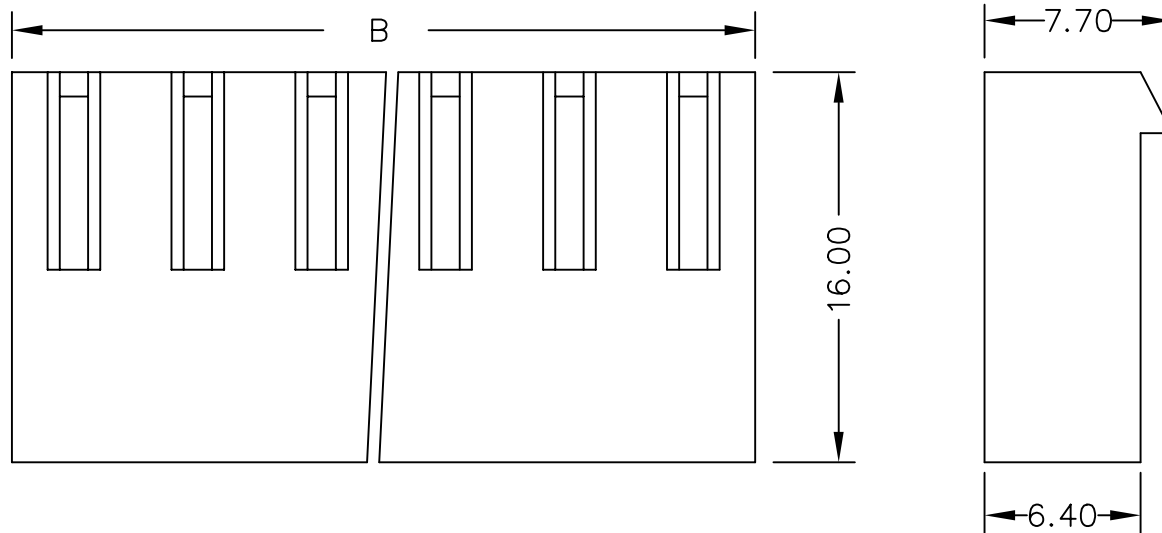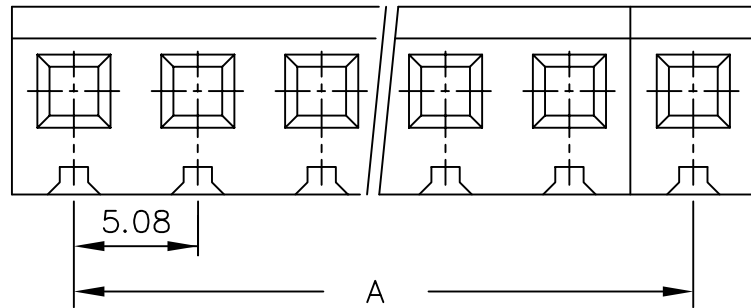

| Poles | Dimension mm (in.) |       | Part No. | Note. |
|-------|--------------------|-------|----------|-------|
|       | A                  | B     |          |       |
| 2     | 5.08               | 10.16 | LK-H-02  |       |
| 3     | 10.16              | 15.24 | LK-H-03  |       |
| 4     | 15.24              | 20.32 | LK-H-04  |       |
| 5     | 20.32              | 25.40 | LK-H-05  |       |
| 6     | 25.40              | 30.48 | LK-H-06  |       |
| 7     | 30.48              | 35.56 | LK-H-07  |       |
| 8     | 35.56              | 40.64 | LK-H-08  |       |
| 9     | 40.64              | 45.72 | LK-H-09  |       |
| 10    | 45.72              | 50.80 | LK-H-10  |       |
| 11    | 50.80              | 55.88 | LK-H-11  |       |
| 12    | 55.88              | 60.96 | LK-H-12  |       |

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. LK-H-xx

DWG NO. LK-H-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ±0.5  
.XX ±0.1  
.XXX  
AWG

DESCRIPTION:

5.08mm Wire-to-Board Housing

AREA

REVISIONS

HK

DATE

煜倫股份有限公司