

Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T

P-V36X-1XxxR-LF
 LEADFREE

RoHS Compliant

RECOMMENDED P.C.B LAYOUT

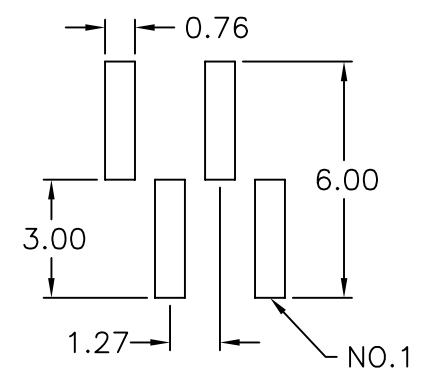

PART NO. P-V36X-1XxxR		CHECKED BY CY		TOLERANCES ARE		DESCRIPTION: 1.27 PIN HEADER SINGLE ROW SMT TYPE BASE 2.54H	
DWG NO. P-V36X-1XxxR		DRAWING BY		.X ± 0.38 .XX ± 0.25 .XXX ± 0.13 AWG		AREA	
FILE NO.		PROJECTION		REVISIONS		HK	
UNIT / mm	SCALE 1:1	DATE					

煜倫股份有限公司