

Note:

1.Material:




- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.20mm
- 1.3 Shell: Spcc,t=0.30mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min.
- 2.5 Total mating force: 4.0 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -55°C~85°C

USB-PSxx-4B-LF
LEADFREE
BK:BLACK
WH:WHITE

RoHS Compliant

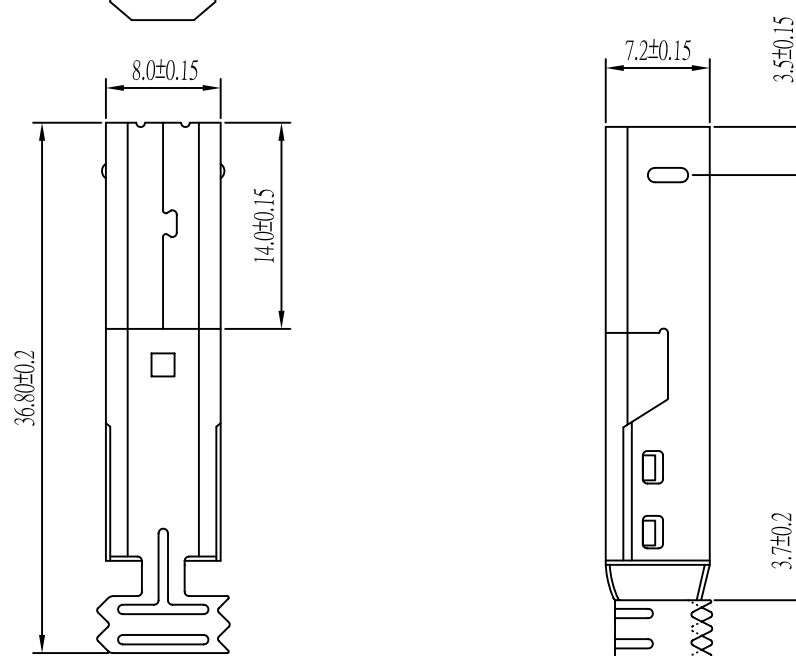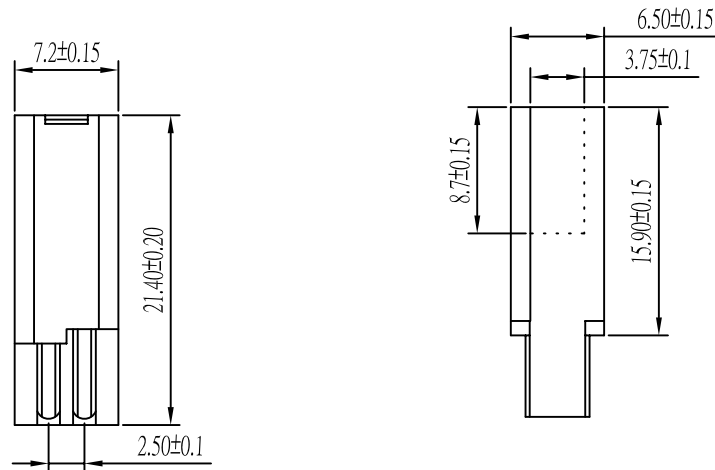

PART NO. USB-PSxx-4B

DWG NO. USB-PSxx-4B

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.3
.XX ± 0.2
.XXX ± 0.1
AWG

DESCRIPTION: USB-B TYPE SOLDER MALE

AREA	REVISIONS	HK	DATE
------	-----------	----	------

煜倫股份有限公司