

Note:

1.Material:

- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.20mm
- 1.3 Shell: Spcc,t=0.30mm


2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min.
- 2.5 Total mating force: 7.0 Kgf Max.
- 2.6 Total unmating force: 1.5 Kgf Min.
- 2.7 Temperature range: -55°C~85°C


PART NO	A±0.25	B±0.20	C±0.20	D±0.20	E±0.30	F±0.25	G±0.25	H±0.05	I±0.10
DS-PSN-09	30.81	24.99	16.92	8.38	15.30		12.55	2.77	2.84
DS-PSN-15	39.25	33.32	25.25	8.38	15.30		12.55	2.77	2.84
DS-PSN-25	53.04	47.04	38.96	8.38	15.30		12.55	2.77	2.84
DS-PSN-37	69.50	63.50	55.42	8.38	15.30		12.55	2.77	2.84

RoHS Compliant


TOLERANCES ARE

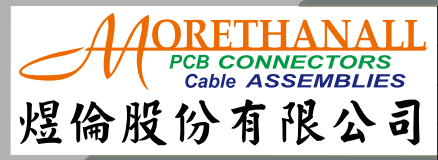

DRAWING BY CY		X, ± .X ± 0.30 .XX ± 0.20 .XXX ± 0.10 ANG ± 1°
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	



ORDER INFORMATION



DESCRIPTION: D-SUB SOLDER 鉚後型 (通孔)

www.morethanall.com