


NOTE:

1, MATERIALS AND FLASH:

INSULATOR: HIGH TEMPERATURE RESIN
 CONTACT: COPPER ALLOY/Au PLATED
 SPRING: STAINLESS STEEL
 SPRING COVER: THERMOPLASTIC UL 94V-0 GRAY
 COVER: THERMOPLASTIC UL 94V-0 BLACK

2, SPECIFICATIONS:




- (1) DURABILITY: 1500 MATING CYCLES MIN.
- (2) CURRENT-MAX: 1.0A
- (3) CONTACT RESISTANCE: 50m OHM MAX. INITIALLY,
75 mOHMS AFTER 5000 CYCLES
- (4) INSULATION RESISTANCE: 500M OHM MIN (AT 250 V DC 1 MINUTE)

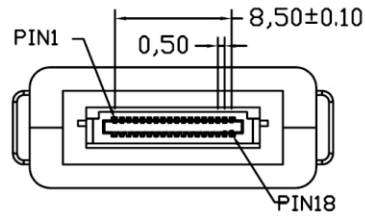

CPSAM-PA-18-LF

LEADFREE

RoHS Compliant

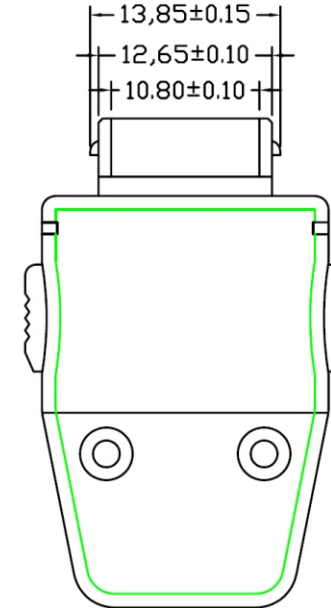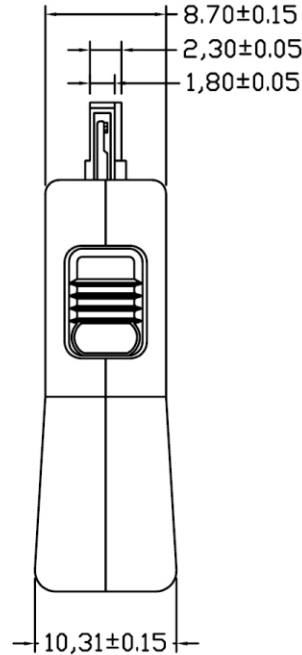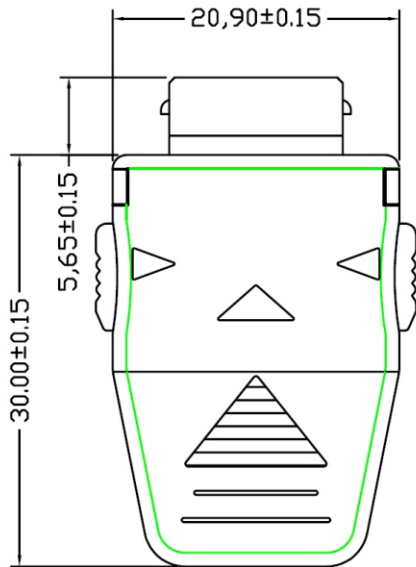

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. **CPSAM-PA-18**

DWG NO. **CPSAM-PA-18**

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG


DESCRIPTION:

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE