

Material and Finish

1. Housing: Nylon 6T (UL94V-0), Black.
2. Terminal: Copper Alloy ($t=0.20\text{mm}$), Gold Plating.

Electrical Characteristics

1. Current Rating: 1.0 Amp. Max..
2. Dielectric Withstand Voltage: 800V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 500V DC.
4. Connect Resistance: 30m Ohms Maximum.

Mechanical Characteristics

1. Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE


SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

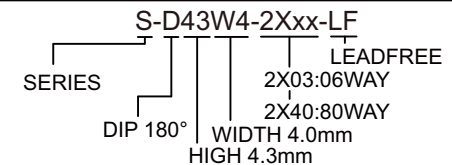

DESCRIPTION: 2.00mm Post Header Receptacle
PCB Mount Vertical Type Dual Rows (H=4.30mm)