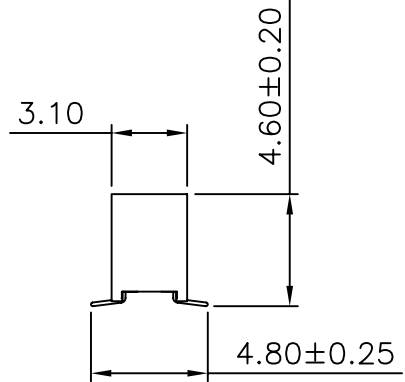

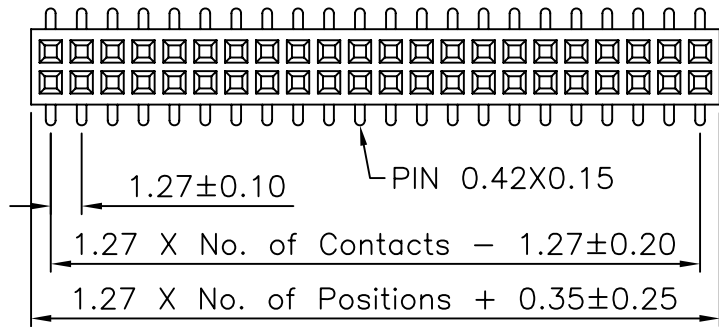


Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0


注：此塑膠用於SMT型態的26~50PIN塑膠材質用LCP料生產, 02~25PIN塑膠材質用PA6T料生產.

YA-V46X-2Xxx-LF

LEADFREE

RoHS Compliant

Recommended P.C.Board Layout



PART NO. YA-V46X-2Xxx									
DWG NO. YA-V46X-2Xxx		APPROVED BY CY		TOLERANCES ARE .X ± 0.38 .XX ± 0.25 .XXX ± 0.13 AWG	DESCRIP TION:	1.27 FEMALE HEADER DUAL ROWS SMT TYPE BASE 4.40H			
FILE NO.		DRAWING BY							
UNIT / mm	SCALE 1:1	PROJECTION			AREA	REVISIONS	HK	DATE	

煜倫股份有限公司