

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F



E

D

C

B


A

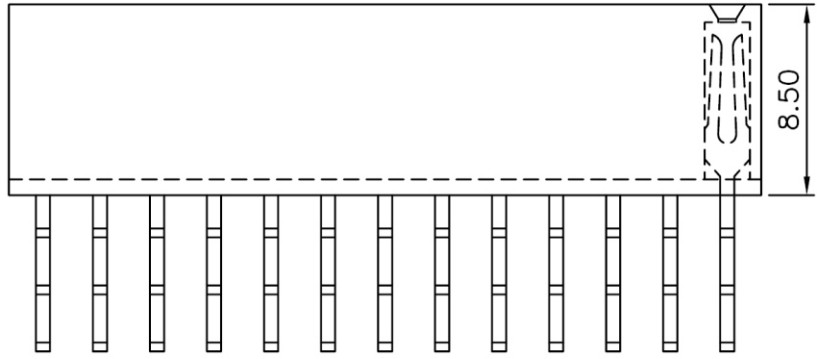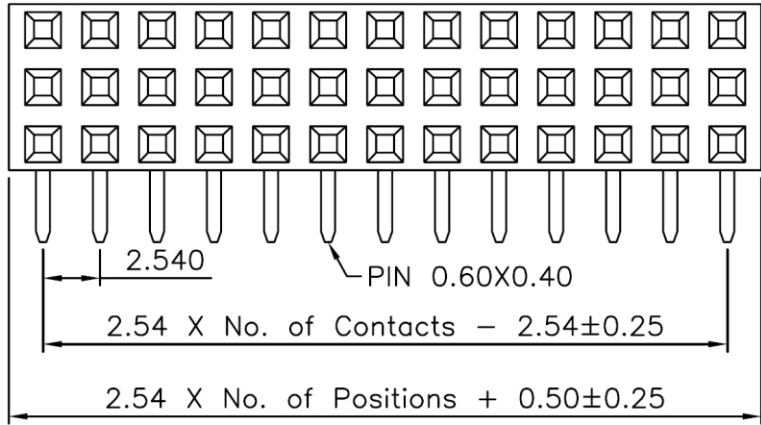


F-R-3Xxx-LF
LEADFREE

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 NYLON-6T
 All materials must be GP materials

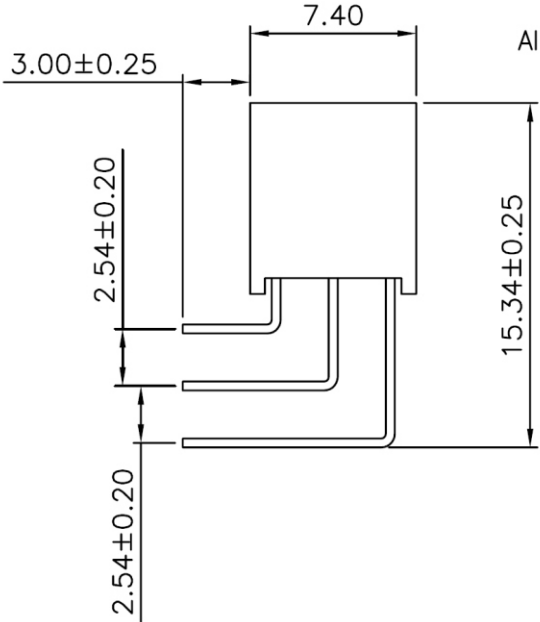

Recommended P.C.Board
Hole Layout



RoHS Compliant



煜倫股份有限公司

PART NO. F-R-3Xxx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION:			
DWG NO. F-R-3Xxx		DRAWING BY						
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1							