

TYPE A

Item	Description	Material	UL File No.
1	Insulation	1403G6	E130155
2	Pin	JIS H3250 C3604 BD	
3	Shell	C3604	
4	O-Ring	NBR	

- MATERIAL**
 INSULATION: THERMOPLASTIC UL94V-0
 COLOR: BLACK.
 CONTACT: BRASS
 SHELL: BRASS
- PLATING**
 CONTACT: TYPE B
 Shell: NICKEL 100u"
- SPECIFICATION**
 CURRENT: 2 A.
 OPERATING TEMPERATURE: -20° C TO 105° C.
 INSULATION RESISTANCE: 1000 MEGAOHMS MIN.
 DIELECTRIC STRENGTH: 500V AC MIN.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4


X, ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ± 0.05
 ANG ± 1°

PJECTION



ORDER INFORMATION

M12-PSPA-05-LF

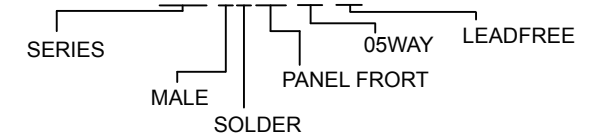

DESCRIPTION: 防水頭 5 PIN(M) 圓形外徑 M12*1.0(半成品)