


Type Open



Type Close




Series Smart Card Connector (V3 Double Type)

SPECIFICATION:

- 1.Contact Material: Phosphor Bronze (SPOON)
- 2.Insulator Material: P.B.T, UL 94V-0
- 3.Terminal Plating: SnPb on nickel
- 4.Switch Contact Plating: Gold(30micro Inch)On Nickel
- 5.Current rating: 1A DC MAX
- 6.Insulation resistance: 1000 Megaohms MIN
- 7.Contact resistance: 100 milliohms MAX
- 8.Withstand voltage: AC 1000V RMS (1MIN)
- 9.Rated voltage: 50V DC MAX
- 10.Temperature Range: -40°C~ +60°C
- 11.Card Insertion Force: 511g MAX
- 12.Card Withdrawal Force: 102g MIN
- 13.Insertion Cycles: 100000 cycles MIN

Note:

- 1.Card Insertion Specification :
A.Card Insertion Depth 35.3mm
B.Card Thickness Depth 0.7 ~ 0.8mm

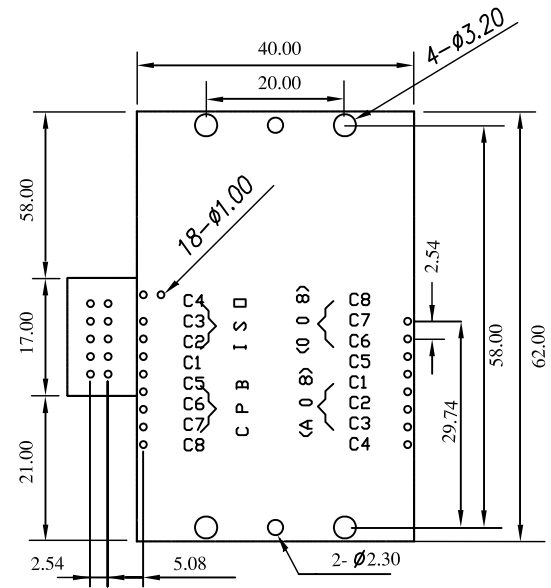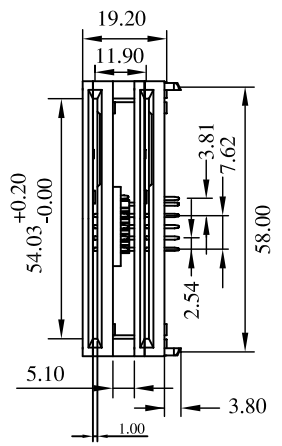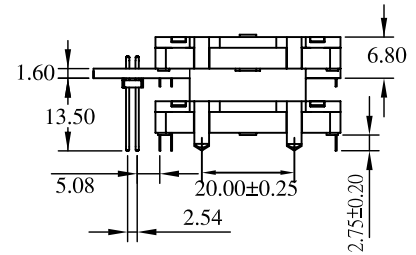

Through Hole Mounting



PART NO. SCFB1-Rx-08

DWG NO. SCFB1-Rx08

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X < 1.00	±0.05
1.00 < X < 5.00	±0.07
5.00 < X < 20.00	±0.10
20.00 < X	±0.15

DESCRIPTION:
AREA

Series Smart Card Connector (V3 Double Type)			
REVISIONS	HK	DATE	

煜倫股份有限公司