

Features:

- 2 ~ 15 circuits available
- Material: UL 94V-0 nylon 66
- Tin-plated brass pin
- .025"(0.64mm) square pin
- Standard color: Orange
- Recommended P.C.B. thickness: .063"(1.6mm)


Specification:

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 20mΩ Max.
- Dielectric withstanding voltage: 800V AC/minute
- Ambient temperature range: -25°C ~ 85°C
(including temperature rise)


Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	2.5	5.5	7	15.0	18.0	12	27.5	30.5
3	5.0	8.0	8	17.5	20.5	13	30.0	33.0
4	7.5	10.5	9	20.0	23.0	14	32.5	35.5
5	10.0	13.0	10	22.5	25.5	15	35.0	38.0
6	12.5	15.5	11	25.0	28.0			




2, 3



4 ~ 6



7 ~ 15

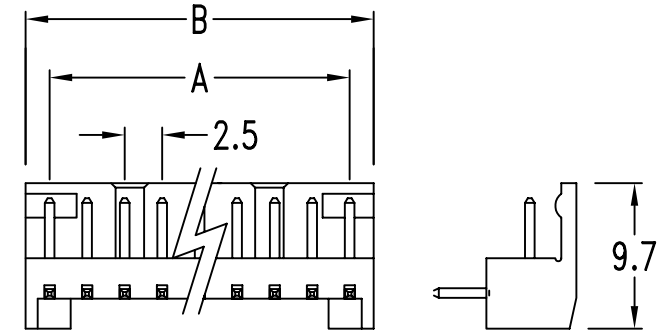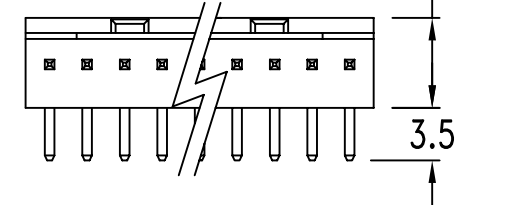

P. C. board hole dimensions

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±


DATE

.XXX ±

ANG ±

SIZE A4

P PROJECTION



ORDER INFORMATION

ILG-R-xx-LF
SERIES | LEADFREE
02~15WAY
DIP 90°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: .098"(2.5mm) Right Angle Header