

NOTES:

***Material**

Housing: Nylon46+30%G.F, UL 94V-0 Rated;
 Contact: Brass.
 Plating: Gold Plating Over Nickel(40~80u")on Contact Area;
 Tin(100~250u")Plating On Solder Tail.
 Harpoon: Brass.
 Plating: Tin(100~250u")Plating Over Nickel(40~80u").

***Electrical Specification**

Operation Voltage: 100 VAC max.
 Current Rating: 1.5 Ampere Per Contact.
 Contact Resistance: 30 mΩ max.
 Insulation Resistance: 1000 MΩ min.
 Dielectric Withstanding Voltage: 500 VAC.

***Environmental**

Operating Temperature: -55°C to +85°C.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE


SIZE A4

PJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

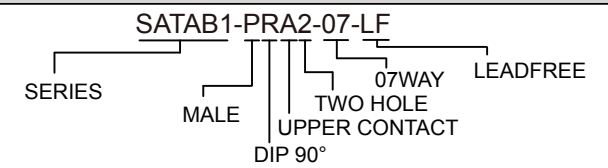

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: Serial ATA of Double Layer 14 Pin Shield Standard Two Hole DIP Type(Whole)Male