


H-V33XCR-1XxxR-LF
 C=CAP R=REEL LEADFREE

RoHS Compliant

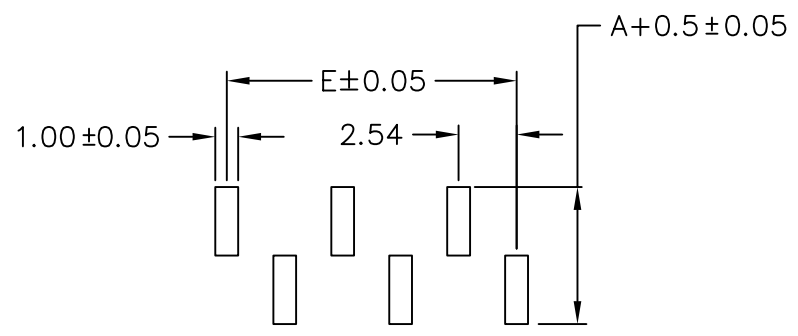

Recommended P.C.B Layout

MATERIAL
 Insulator : NYLON 6T
 Contact Pin : Brass

SPECIFICATION
 Current Rate : 3 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

| POLES | DIM E | POLES | DIM E |
|-------|-------|-------|-------|
| | | 18 | 43.18 |
| 2 | 2.54 | 19 | 45.72 |
| 3 | 5.08 | 20 | 48.26 |
| 4 | 7.62 | 21 | 50.80 |
| 5 | 10.16 | 22 | 53.34 |
| 6 | 12.70 | 23 | 55.88 |
| 7 | 15.24 | 24 | 58.42 |
| 8 | 17.78 | 25 | 60.96 |
| 9 | 20.32 | 26 | 63.50 |
| 10 | 22.86 | 27 | 66.04 |
| 11 | 25.40 | 28 | 68.58 |
| 12 | 27.94 | 29 | 71.12 |
| 13 | 30.48 | 30 | 73.66 |
| 14 | 33.02 | 31 | 76.20 |
| 15 | 35.56 | 32 | 78.74 |
| 16 | 38.10 | 33 | 81.28 |
| 17 | 40.64 | | |

| CODE | DIM A | DIM B | DIM C |
|--------------|-------|-------|-------|
| H-V33X-1XxxR | 5.00 | 6.00 | 3.30 |

If you need other dimensions,
 please fill out Dim A/B/C or
 contact our sales representatives.



PART NO. H-V33X-1XxxR

DWG NO. H-V33X-1XxxR

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.30
 .XX ± 0.20
 .XXX
 AWG

DESCRIPTION:
 AREA

PIN HEADER 2.54*2.54mm
 SMT B TYPE, SINGLE ROW
 REVISIONS
 HK
 DATE

煜倫股份有限公司