

1 2 3 4 5 6 7 8 9 0

J

I

H

G

F




E

D

C

B

A

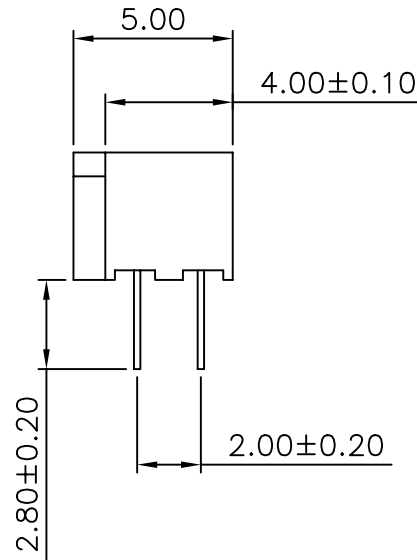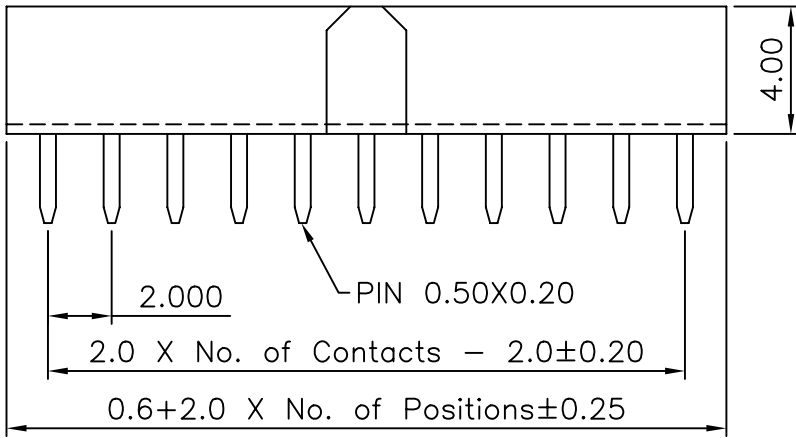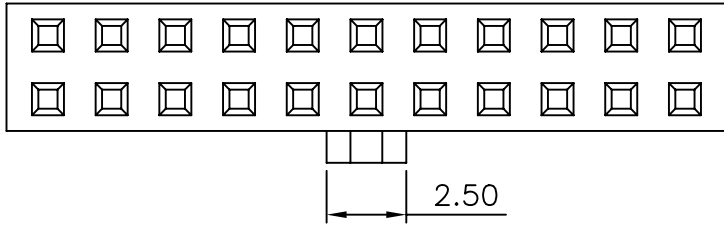


Specifications

Current Rating: 2Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 500V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon-6T  
 All materials must be GP materials

Recommended P.C.Board  
 Hole Layout

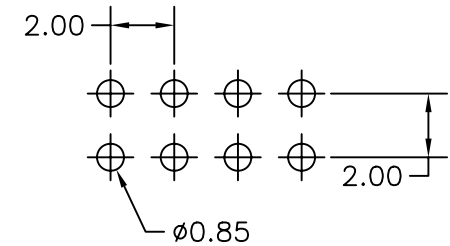

**MORETHANALL**  
 CONNECTORS  
 ASSEMBLIES

PART NO. SK-D40-2Xxx

DWG NO. SK-D40-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE  
 .X ± 0.38  
 .XX ± 0.25  
 .XXX ± 0.13  
 AWG

DESCRIP TION:  
 AREA

2.0 FEMALE HEADER DIP TYPE BASE 4.00H  
 REVISIONS  
 HK  
 DATE

煜倫股份有限公司