
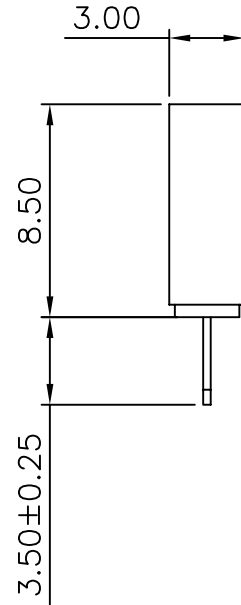
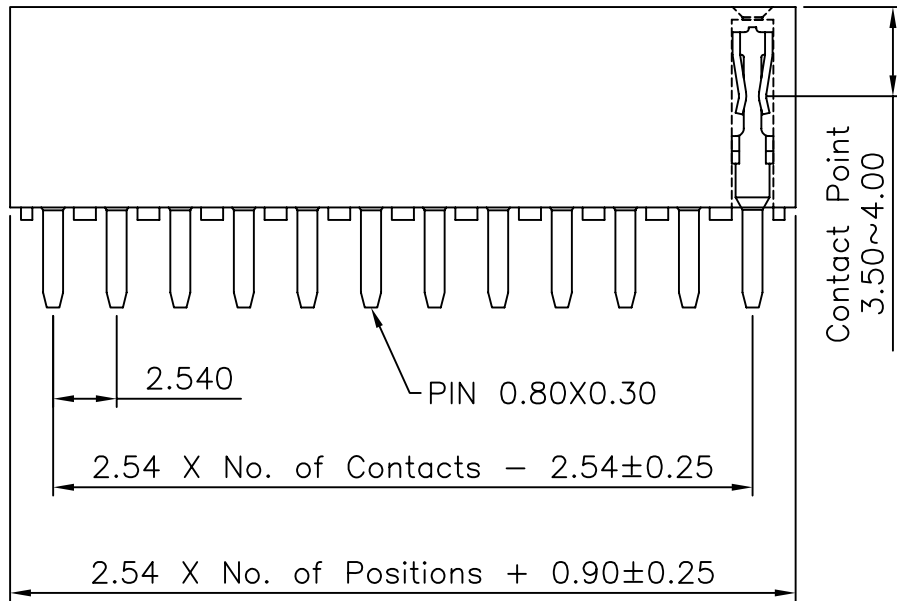


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A



Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 P.B.T

F-D85-1Xxx-LF
 LEADFREE

RoHS Compliant

Recommended P.C.Board
 Hole Layout



MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. F-D85-1Xxx

DWG NO. F-D85-1Xxx

FILE NO.

APPROVED BY CY

DRAWING BY

TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 .XXX ±0.13
 AWG

DESCRIPTION: 254 FEMALE HEADER SINGLE ROW DIP TYPE BASE 8.5H

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA	REVISIONS	HK	DATE
------	-----------	----	------