
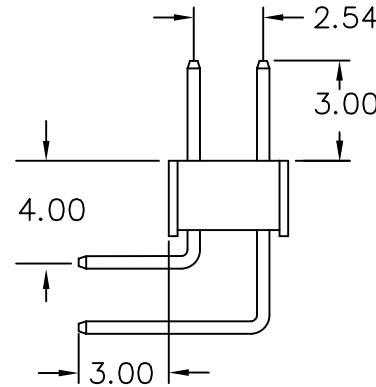


MATERIAL

Insulator : NYLON 6T
Contact Pin : Brass


SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Operation Temperature : -55°C to + 105°C

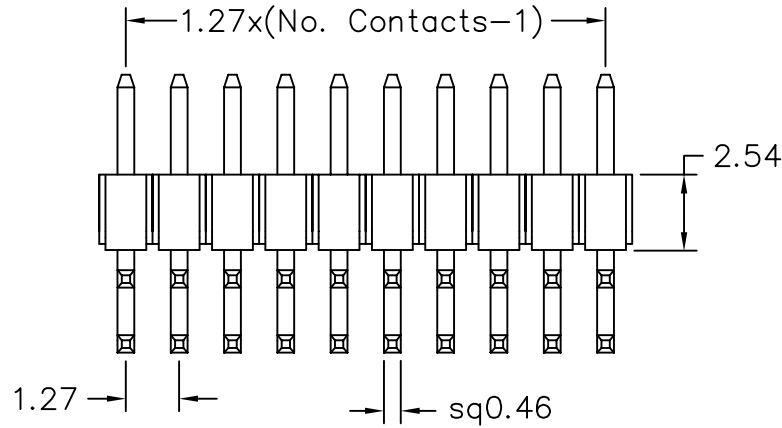

P-R3030-2Xxx-LF
LEADFREE

RoHS Compliant

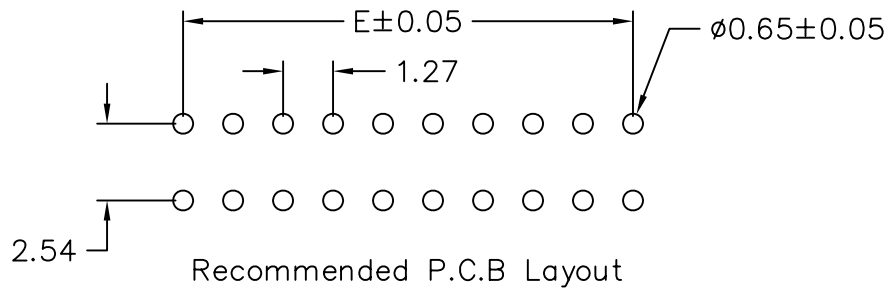

PART NO. P-R3030-2Xxx

DWG NO. P-R3030-2Xxx

FILE NO.

APPROVED BY CY

DRAWING BY

TOLERANCES ARE
.0 = ±.30
.00 = ±.20
.000 = ±.XXX
.0000 = ±.
ANG. = ±3°

DESCRIPTION:
AREA

PIN HEADER 1.27*2.54mm
RIGHT ANGLE TYPE, DUAL ROWS
REVISIONS
HK
DATE

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION