

RECOMMENDED PCB LAYOUT

- * Material : Nylon66, UL 94V-2
- * Current rating : 5A, AC/DC
- * Voltage rating : 250V AC/DC
- * Finish : Tin-plated
- * Operating Temp : -25°C ~ +85°C
- * Contact resistance : 10mΩ Max.
- * Insulation resistance : 1000MΩ Min.
- * Withstanding Voltage : 1500V AC/minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE


SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

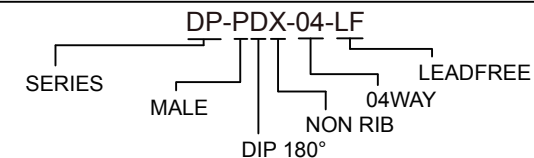

DESCRIPTION: 5.08mm Wire-to-Board Header DIP 180° Type